

SECTION R - TABLE OF CONTENTS

Section R Contents:

Solvents 2-7

Wood Glues 8-14

Melamine & Dowel Glues 15-16

Cold Press Adhesives 17-19

Polyurethane Glue &
Instant Adhesives 20-21

Glue Bottles & Applicators 22

Hot Melt Glues 23-24

Flammable Bulk Contact Adhesives... 25-29

Non-Flammable Bulk
Contact Adhesives 30-31

Flammable & Non-Flammable Canister
Adhesives 32-37

Solvents / Cleaners / Reducers 38

Aerosol Contact Adhesives 39-42

Edgebanding Adhesives 43-49

Construction Adhesives 50-51

Caulks / Sealants / Glaze Coats 52-54

Touch-Up Sticks 55

Wood Fillers & Bondo® 55-59

Laminate Repairers 60



A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



NOTE: Some of the items in this section are not available in all markets. Please contact your Würth Louis and Company representative for more information.

A SOLVENTS

Mid-Temp Thinner
Features:

- Thinner with a medium evaporation rate
- Suitable for mixing in certain paints and stains
- More aggressive than standard thinners

Applications:

- Wood/furniture finishing and refinishing

Item #	Description
WRMIDTEMP-05	5 Gal Mid-Temp Thinner
WRMIDTEMP-55	55 Gal Mid-Temp Thinner


Lacquer Thinner (Medium Dry)
Features:

- Slower evaporation rate than standard thinner
- Increases dry time in paints and lacquers
- Eliminates lacquer "blushing"

Applications:

- Useful in high heat applications where slower drying is required
- Perfect for cleaning spray equipment

Item #	Description
WRMEDIUMDRY-01	1 Gal Medium Dry Lacquer Thinner
WRMEDIUMDRY-05	5 Gal Medium Dry Lacquer Thinner
WRMEDIUMDRY-55	55 Gal Medium Dry Lacquer Thinner


Contact Cement Thinner
Features:

- Reduces the viscosity of contact cement

Applications:

- Ideal product for cleaning spray equipment after use
- Removes overspray and dried adhesive
- Excellent solvent for cleaning brushes, wood, metal, and glass

Item #	Description
WRCEMENTHIN-01	1 Gal Contact Cement Thinner
WRCEMENTHIN-05	5 Gal Contact Cement Thinner
WRCEMENTHIN-55	55 Gal Contact Cement Thinner



SOLVENTS

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Acetone



Features:

- Mixes easily with water and has a very fast evaporation rate
- Thins the viscosity of lacquer solutions
- VOC exempt

Applications:

- Reduces the viscosity of lacquers and two part epoxies
- Thins oil-based paints and polyester resins
- Tool cleaner

Item #	Description
WRACETONE-01	1 Gal Acetone
WRACETONE-05	5 Gal Acetone
WRACETONE-55	55 Gal Acetone



Denatured Alcohol



Features:

- Less aggressive cleaning solution when surface integrity is in question

Applications:

- Used to clean and thin shellac
- Removes dried latex paint and ink
- Used to wipe down wood surfaces to remove moisture before finishing
- Highly effective as a solvent and cleaning agent

Item #	Description
WRDENALCOHOL-01	1 Gal Denatured Alcohol
WRDENALCOHOL-05	5 Gal Denatured Alcohol
WRDENALCOHOL-55	55 Gal Denatured Alcohol



Isopropyl Alcohol



Features:

- Fast evaporation rate
- Easily dissolvable in a wide range of chemical compounds
- Less aggressive cleaning solution when surface integrity is in question

Applications:

- Used to clean and thin shellac
- Used to wipe down wood surfaces to remove moisture before finishing
- Highly effective as a solvent and cleaning agent

Item #	Description
WRISOALCOHOL-01	1 Gal Isopropyl Alcohol
WRISOALCOHOL-05	5 Gal Isopropyl Alcohol
WRISOALCOHOL-55	55 Gal Isopropyl Alcohol

A SOLVENTS

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Mineral Spirits



Features:

- Solvent-based oil paint thinner and cleaner
- Slow rate of evaporation
- Low odor

Applications:

- Dissolves wax, oil, and greasy grime from wood and metal surfaces
- Reduces dry time of oil-based glazes and paints
- Great for cleaning brushes and rollers

Item #	Description
WRMINSPIRITS-01	1 Gal Mineral Spirits
WRMINSPIRITS-05	5 Gal Mineral Spirits
WRMINSPIRITS-55	55 Gal Mineral Spirits



Methyl Ethyl Ketone



Features:

- Slower rate of evaporation than acetone

Applications:

- Removes contact cement, ink, adhesives, and heavy grease/grime
- Reduces coatings and resins in fiberglass repair

Item #	Description
WRMEK-01	1 Gal Methyl Ethyl Ketone
WRMEK-05	5 Gal Methyl Ethyl Ketone
WRMEK-55	55 Gal Methyl Ethyl Ketone



Naphtha



Features:

- Stronger than mineral spirits with a faster rate of evaporation

Applications:

- Perfect cleaner for metal surfaces and tools
- Great for cleaning brushes
- Can be used to thin Spar Varnish, epoxies, and oil-based paints

Item #	Description
WRNAPHTHA-01	1 Gal Naphtha
WRNAPHTHA-05	5 Gal Naphtha
WRNAPHTHA-55	55 Gal Naphtha

SOLVENTS



N-Butyl Acetate



Features:

- Acts as cleaning solvent

Applications:

- Used for thinning urethane coatings
- For use on paint, coatings, and a variety of industrial applications

Item #	Description
WRNBA-05	5 Gal N-Butyl Acetate
WRNBA-55	55 Gal N-Butyl Acetate

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Methyl Amyl Ketone (MAK)



Features:

- High solvency
- Works with cellulosic lacquer and acrylic lacquers

Applications:

- For solvent borne painted and stained surfaces

Item #	Description
WRMAK-05	5 Gal Methyl Amyl Ketone



Lacquer Retarder



Features:

- Lacquer additive with a slower evaporation rate than standard and medium dry thinner

Applications:

- Great for increasing dry time in paints and lacquers
- Useful in high heat applications where slower drying is desired
- Eliminates lacquer "blushing"

Item #	Description
WRRETARDER-05	5 Gal Lacquer Retarder

A SOLVENTS

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



CAL Compliant Wash Thinner



Features:

- Can be sold in the state of California
- Faster evaporation rate than standard thinner and modest cleaning power

Applications:

- For cleaning spray equipment in industrial wood or metal finishing
- Can be mixed with certain stains and paints

Item #	Description
WRCATHINNER-01	1 Gal Cal Compliant Wash Thinner
WRCATHINNER-05	5 Gal Cal Compliant Wash Thinner
WRCATHINNER-55	55 Gal Cal Compliant Wash Thinner



Wash Thinner



Features:

- Lacquer thinner with faster evaporation rate than the standard thinner and medium cleaning power

Applications:

- For cleaning spray equipment in Industrial wood or metal finishing
- Can be mixed with certain stains and paints

Item #	Description
WRWSHTINNER-01	1 Gal Wash Thinner
WRWSHTINNER-05	5 Gal Wash Thinner
WRWSHTINNER-55	55 Gal Wash Thinner

SOLVENTS



Table Top and Bar Epoxy Resin & Hardener



Features:

- Two part professional component epoxy coating designed for table, bar top, and slab wood applications
- Coats can be 1/8" to 1/4" thick
- Easy to use formula with a 1 to 1 mixing ratio
- Once cured, finish provides a thick, clear protective coating impervious to alcohol, solvents, and everyday use
- 100% solids
- Cure times can vary depending on temperature, humidity, and thickness

Applications:

- Great for bar tops, table tops, and wood slabs (incredible gap filling properties)
- Can be used for decoupage projects
- Pour over or brush applications

Item #	Description
WRTABLETOPEPOXY	1 GAL RESIN & 1 GAL HARDENER

Coverage Chart

Area	Resin Mixture
Seal Coat	
1 sq. ft.	3 oz
4 sq. ft.	11 oz
10 sq. ft.	26 oz
16 sq. ft.	42 oz
24 sq. ft.	64 oz
Flood Coat	
1 sq. ft.	8 oz
4 sq. ft.	32 oz
10 sq. ft.	80 oz
16 sq. ft.	128 oz
24 sq. ft.	192 oz



A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A YELLOW WOOD GLUES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Professional Grade Yellow Assembly Glue



- Fast setting
- Superior sandability
- Ideal for interior wood bonding
- Can be used to bond hard & soft woods and veneers
- Freeze thaw stable (3 cycles)
- Low chalking temperature
- Non-toxic
- Easy clean up
- Paintable and not affected by most stains and finishes
- OTC & CAL Compliant

Item #	Size	Color
WRG714Y-1	1 Gal	Yellow
WRG714Y-5	5 Gal	Yellow
WRG714Y-55	55 Gal	Yellow



Type I Professional Grade Yellow Wood Glue



- Fast setting
- Superior sandability
- Ideal for interior wood bonding
- Can be used to bond hard & soft woods and veneers
- Freeze thaw stable (3 cycles)
- Low chalking temperature
- Non-toxic
- Easy clean up
- Paintable and not affected by most stains and finishes
- OTC & CAL Compliant

Item #	Size	Color
FGF714Y-1G	1 Gal	Yellow
FGF714Y-5G	5 Gal	Yellow

**Visit us on
our website:
wurthlac.com**

Wurth Louis and Company | Large Machinery Quote | Feedback | Register or Apply | Sign in | En

WÜRTH Enter search criteria here Shopping Cart 10.00

Shop By Category Home

SEE SAFELY

NOW HIRING! Apply at: wurthlac.com/careers

SUPPLY CHAIN CHALLENGES? We have you COVERED. LEARN MORE

YELLOW WOOD GLUES



Titebond® Original Glue

- Bonds wood, hardboard, high pressure laminates and particleboard
- Open time: 5 minutes
- Assembly time: 10-15 minutes
- Application temperature: Above 50°F
- Viscosity: 3,200 cps



Item #	Size	Color	Dries
FR506-2	4 oz.	Yellow	Translucent, Yellow
FR506-3	8 oz.	Yellow	Translucent, Yellow
FR506-4	16 oz.	Yellow	Translucent, Yellow
FR506-5	Quart	Yellow	Translucent, Yellow
FR506-6	Gallon	Yellow	Translucent, Yellow
FR506-9	2.15 Gallon	Yellow	Translucent, Yellow
FR506-7	5 Gallon	Yellow	Translucent, Yellow
FR506-8	55 Gallon	Yellow	Translucent, Yellow

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Titebond® Extend Wood Glue

- Slower setting version of Titebond original
- Excellent heat-resistance
- Broad range of applications including edge and face gluing
- Ideal for complex assemblies and bent laminations
- Bonds wood, particleboard, MDF, plywood and other porous materials
- Open time: 15 minutes
- Assembly time: 20-25 minutes
- Application temperature: Above 40°F
- Viscosity: 3,500 cps



Item #	Size	Color	Dries
FR9104	16 oz.	Yellow	Yellow
FR910-6	Gallon	Yellow	Yellow
FR910-7	5 Gallon	Yellow	Yellow



Super Titebond® Glue

- Resists stress imposed by heat and moisture during production; ideal glue for edge and face gluing
- Open time: 5 minutes
- Assembly time: 15-20 minutes
- Application temperature: Above 40°F
- Viscosity: 3,500 cps



Item #	Size	Color	Dries
FR507-5	5 Gallon	Yellow	Translucent
FR507-8	55 Gallon	Yellow	Translucent

A WATER RESISTANT WOOD GLUES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Water Resistant Professional Grade Exterior Assembly Glue



- Ideal for applications such as exterior furniture, RF gluing, hot/cold press or where a high level of moisture resistance is required
- Passes all ANSI Type II water resistance tests
- Hot or cold press
- Fast set
- RF gluing
- Superior sandability
- OTC & CAL Compliant
- Not intended for applications below the waterline or for continuous submersion

Item #	Size	Color
WRG716Y-1	1 Gal	Yellow
WRG716Y-05	5 Gal	Yellow
WRG716Y-55	55 Gal	Yellow



Formica Type II Water Resistant Professional Grade, Yellow Wood Glue



- Ideal for applications such as exterior furniture, RF gluing, hot/cold press or where a high level of moisture resistance is required
- Passes all ANSI Type II water resistance tests
- Hot or cold press
- Fast set
- RF gluing
- Superior sandability
- OTC & CAL Compliant
- Not intended for applications below the waterline or for continuous submersion

Item #	Size	Color
WRG716Y-1	1 Gal	Yellow
WRG716Y-05	5 Gal	Yellow
WRG716Y-55	55 Gal	Yellow

WATER RESISTANT WOOD GLUES



Titebond® II Premium Wood Glue Water Resistant



- Passes ANSI Type II water-resistance
- Ideal for exterior wood projects including outdoor furniture and exterior doors, window and trim
- Ideal for radio frequency (R-F) and hot press gluing systems
- FDA approved for indirect food contact
- Open time: 5 minutes
- Assembly time: 10-15 minutes
- Application temperature: Above 55°F
- Viscosity: 4,000 cps

Item #	Size	Color	Dries
FR5003	8 oz.	Honey Cream	Translucent, Yellow
FR500-4	16 oz.	Honey Cream	Translucent, Yellow
FR500-5	Quart	Honey Cream	Translucent, Yellow
FR500-6	Gallon	Honey Cream	Translucent, Yellow
FR500-9	2.15 Gallon	Honey Cream	Translucent, Yellow
FR500-7	5 Gallon	Honey Cream	Translucent, Yellow
FR500-8	55 Gallon	Honey Cream	Translucent, Yellow



Titebond® II Extend Wood Glue



- Ideal for hot press and radio frequency (RF) gluing systems
- Passes Type II water-resistance testing
- Heat and solvent-resistant
- Excellent sandability
- Open time: 15 minutes
- Assembly time: 20-25 minutes
- Application temperature: Above 60°F
- Viscosity: 3,500 cps

Item #	Size	Color	Dries
FR4134	16 oz.	Off White	Cream
FR413-6	Gallon	Off White	Cream
FR413-7	5 Gallon	Off White	Cream
FR413-8	55 Gallon	Off White	Cream

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

WATER PROOF & QUICK DRY WOOD GLUES



**Titebond® III Ultimate Wood Glue
Water Proof**



- Non-toxic, solvent free, cleans up with water
- Passes ANSI/HPVA Type I water-resistance
- Strong initial tack
- Designed for interior and exterior applications
- FDA approved for indirect food contact
- Open time: 10 minutes
- Assembly time: 20-25 minutes
- Application temperature: Above 45°F
- Viscosity: 4,200 cps

Item #	Size	Color	Dries
FR141-3	8 oz.	Tan	Light Brown
FR141-4	16 oz.	Tan	Light Brown
FR141-5	Quart	Tan	Light Brown
FR141-6	Gallon	Tan	Light Brown
FR141-9	2.15 Gallon	Tan	Light Brown
FR141-7	5 Gallon	Tan	Light Brown
FR141-8	55 Gallon	Tan	Light Brown



Assembly High Tack



- For general assembly as well as edge and face gluing of hardwoods & softwoods
- Dries very rapidly to give a short clamp time and has high solvent-resistance
- Open assembly time: 2-10 minutes
- Application temperature: Above 50°F
- Viscosity: 3,000 cps

Item #	Size	Color	Dries
FR2213-7	5 Gallon	Cream	Translucent

WHITE WOOD GLUES



Professional Grade White Assembly Glue



- Fast setting
- Superior sandability
- Ideal for interior wood bonding
- Can be used to bond hard & soft woods and veneers
- Freeze thaw stable (3 cycles)
- Low chalking temperature
- Non-toxic
- Easy clean up
- Paintable and not affected by most stains and finishes
- OTC & CAL Compliant

Item #	Size	Color
WRG714W-1	1 Gal	White
WRG714W-5	5 Gal	White

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Fast Setting White Wood Glue



- Allows for use in cabinet assembly, face and edge gluing with minimal clamp time
- Fast setting
- Water clean up
- High solids
- For use with a glue bottle or spreader
- OTC & CAL Compliant

Item #	Size	Color
WRG522W-1	1 Gal	White
WRG522W-5	5 Gal	White
WRG522W-55	55 Gal	White

A WHITE WOOD GLUES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Professional Grade White Wood Glue



- Fast setting
- Superior sandability
- Ideal for interior wood bonding
- Can be used to bond hard & soft woods and veneers
- Freeze thaw stable (3 cycles)
- Low chalking temperature
- Non-toxic
- Easy clean up
- Paintable and not affected by most stains and finishes
- OTC & CAL Compliant

Item #	Size	Color
FGF715Y-1G	1 Gal	White
FGF715-5G	5 Gal	White
FGF715-55G	55 Gal	White



Fast Setting White Wood Glue



- Allows for use in cabinet assembly, face and edge gluing with minimal clamp time
- Fast setting
- Water clean up
- High solids
- For use with a glue bottle or spreader
- OTC & CAL Compliant

Item #	Size	Color
FGF522-01	1 Gal	White



White Glue, Fast Set Time



- Forms a hard, tough glue line
- Open time: 4-5 minutes
- Assembly time: 4-6 minutes
- Application temperature: Above 58°F
- Viscosity: 11,500 cps

Item #	Size	Color	Dries
ADJOW110.60	5 Gallon	White	Opaque

FLUORESCENT WOOD & MELAMINE GLUES



Titebond® White Glue

- Ideal for bonding most porous materials
- No solvent vapors
- Open time: 5 minutes
- Assembly time: 10-15 minutes
- Application temperature: Above 50 °F
- Viscosity: 8,500 cps



Item #	Size	Color	Dries
FR502-6	1 Gallon	White	Translucent
FR502-7	5 Gallon	White	Translucent
FR502-8	55 Gallon	White	Translucent



Titebond® II Fluorescent Wood Glue

- Visible under black light
- Enables detection and removal of dried glue before finishing
- Passes ANSI Type II water-resistance
- Bonds wood, hardboard, high pressure laminates and particleboard
- Excellent heat and solvent-resistance
- Ideal for radio frequency (RF) gluing systems
- Open time: 5 minutes
- Assembly time: 10-15 minutes
- Application temperature: Above 55 °F
- Viscosity: 4,000 cps



Item #	Size	Color	Dries
FR2317	5 Gallon	Honey Cream	Translucent, Yellow



Titebond® Melamine Glue

- Bonds melamine, vinyl coated products, and HPL to porous materials
- Thick formulation - fewer runs and drips
- Fast initial tack
- Open time: 5 minutes
- Assembly time: 10-15 minutes
- Application temperature: Above 40 °F
- Viscosity: 12,000 cps



Item #	Size	Color	Dries
FR401-4	16 oz.	White	Clear
FR401-6	1 Gallon	White	Clear
FR401-7	5 Gallon	White	Clear

A MELAMINE & DOWEL INSERTION GLUES

**B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y**



Rooclear™ Melamine Glue



- Use on melamine, vinyl, laminate, PVC edgebanding, wood veneer and acrylics
- Dries quickly to produce a clear, water resistant bond with very high tensile strength
- Open time: 10-15 minutes
- Assembly time: 30-90 minutes
- Application temperature: Above 45 °F
- Viscosity: 4,850 cps

Item #	Size	Color	Dries
YYRGPT	16 oz.	White	Clear
YYRG-6	1 Gal.	White	Clear
YYRG-7	5 Gal.	White	Clear



Titebond® Doweling Glue



- Compatible with most US made doweling machines; refer to machine owners manual for details
- Application temperature: Above 50 °F
- Viscosity: 1,500 cps

Item #	Size	Color	Dries
FR220-7	5 Gallon	White	Translucent



Titebond® Doweling Glue LV



- Compatible with most European made doweling machines; refer to owners manual for details
- Assembly time: 0-5 minutes
- Application temperature: Above 45 °F
- Viscosity: 140 cps

Item #	Size	Color	Dries
FR381-7	5 Gallon	White	Translucent



**Dowel Insertion Glue,
For American & European Machines**



- Especially designed for low pressure doweling machines from Koch, Hoffman, Lehbrink, Weeke, and Accu Systems
- Contains a UV indicator and special additives to prevent nozzle clogging
- Application temperature: Above 58 °F
- Viscosity: 125 cps

Item #	Size	Color	Dries
ADJOW114.60	5 Gallon	White	Opaque

COLD PRESS AND NIP & STACK ADHESIVES



Cold Press Laminating Adhesive



- General purpose white laminating and assembly adhesive
- Green Guard Certified, LEED 3.2, 4.1, 4.4 Compliant
- OTC & CAL Compliant
- Medium setting
- Aggressive wet tack

Item #	Size	Color
WRG2700C-5	5 Gal	White
WRG2700C-55	55 Gal	White



Premium Cold Press Laminating Adhesive



- CAL & OTC Compliant
- Medium setting
- Aggressive wet tack
- High solids
- General purpose laminating and assembly adhesive
- Excellent flow-ability

Item #	Size	Color
WRGXA2400-5	5 Gal	White



Crosslinking Water Resistant Hot Press Adhesive



- White crosslinkable polyvinyl acetate that is pre-catalyzed and formulated to be ready for use
- Can be used in a cold or hot press and can be used in RF gluing applications
- Used in automated glue spreader or manually applied
- Excellent machinability and stability
- High solids
- Water resistant
- OTC & CAL Compliant

Item #	Size	Color
WRGHOTPRESS-5	5 Gal	White

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A COLD PRESS AND NIP & STACK ADHESIVES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Nip & Stack, Hot/Cold Press, Premium Laminating Adhesive



- Green color
- Suitable for cold press, hot press, postforming, or nip and stacking
- Fast setting
- High solids
- Postformable
- Green Guard Certified
- OTC & CAL Compliant

Item #	Size	Color
WRG7709G-5	5 Gal	Green
WRG7709G-55	55 Gal	Green



Cold Press Laminating Adhesive



- General purpose laminating and assembly wood glue
- Green Guard Certified, LEED 3.2, 4.1, 4.4 Compliant
- OTC & CAL Compliant
- Medium setting
- Aggressive wet tack

Item #	Size	Color
FGXA2600-05	5 Gal	White



Nip & Stack, Hot/Cold Press, Premium Laminating Adhesive



- Suitable for cold press, hot press, postforming, or nip and stacking
- Fast setting
- High solids
- Postformable
- Green Guard Certified
- OTC & CAL Compliant

Item #	Size	Color
FG7709TG-05G	5 Gal	Green

COLD PRESS AND NIP & STACK ADHESIVES



Titebond® Cold Press for HPL

- Specifically formulated for cold press laminating of HPL and backed veneers to solid woods, particle board, MDF and other porous materials
- Economical alternative to contact cement for large scale flat laminating
- Open time: 15 minutes
- Assembly time: 15-20 minutes
- Application temperature: Above 50°F
- Viscosity: 4,500 cps



Item #	Size	Color	Dries
FR461-7	5 Gallon	Off White	Translucent



Titebond® Cold Press for Veneer

- Specifically formulated for cold press laminating of wood to solid woods, particleboard, MDF, plywood and other porous materials
- Economical alternative to contact cement
- Formulated to minimize "bleed-through"
- No harmful vapors, non-flammable
- Open time: 15 minutes
- Assembly time: 15-20 minutes
- Application temperature: Above 50°F
- Viscosity: 4,500 cps



Item #	Size	Color	Dries
FR517-6	1 Gallon	Tan	Dark Brown
FR517-7	5 Gallon	Tan	Dark Brown



Titebond® Quick & Thick

- Ideal for finish trim, crown moulding, baseboards and window casings
- Extra-thick formula helps fill small cracks and gaps
- Strong initial tack
- Open time: 3-5 minutes
- Assembly time: 10-15 minutes
- Application temperature: Above 50°F
- Viscosity: 36,500 cps



Item #	Size	Color	Dries
FR2403	8 oz.	Beige	Translucent
FR2404-16	16 oz.	Beige	Translucent

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

SPECIALTY GLUES



Fastfix Gel Adhesive

- Non-flowing; will not drip
- High temperature resistance to 212° F
- Sold by the tube



Item #	Size
WR0893403	0.11 oz

Titebond® Instant Bond



- CA (Cyanoacrylate) 2 part adhesive system that takes between 5-15 seconds to set and 30-60 seconds to cure
- Two year shelf life
- **Activator:** Heptane based instant bond activator
- **Thin adhesive:** Designed for use when filling cracks
- **Medium adhesive:** Designed for smooth surfaces
- **Thick adhesive:** Designed for porous surfaces
- **Gel adhesive:** Will not run; good for use in vertical applications



Activator Item #	Thin Item #	Medium Item #	Thick Item #	Gel Item #	Size
FR6311	FR620-1	FR6211	FR6221	FR6231	2 oz.
-	FR6202	FR6212	FR6222	FR6232	4 oz.

TWO PART INSTANT GLUES



Adhesive Types:

Thin: Filling micro cracks, zero glue line.

Medium: Use on smooth surfaces such as melamine and laminate.

Thick: Use on porous surfaces such as particle board.

Jel: Will not run, all purpose application, excellent for vertical surfaces.

Two Part Instant Glue Adhesive System Kit, Industrial Grade



- Kit includes: (1) each 2 oz. bottles of Thin, Medium, Thick and Jel Adhesives; Activator, Debonder, micro-tips and carrying case
- Sold by the each

Item #	Description	Size
FC2P10	2P10 Kit	
Kit Refills		
FC2P10THIN2	Thin Adhesive	2 oz. bottle
FC2P10MED	Medium Adhesive	2 oz. bottle
FC2P10THK	Thick Adhesive	2 oz. bottle
FC2P10JEL2	Jel Adhesive	2 oz. bottle
FC2P10DBNDR	Debonder	2 oz. bottle
FC2P10ACT	Activator	2 oz. bottle



Adhesive Types:

Thin: Filling micro cracks, zero glue line.

Medium: Use on smooth surfaces such as melamine and laminate.

Thick: Use on porous surfaces such as particle board.

Jel: Will not run, all purpose application, excellent for vertical surfaces.

Two Part Instant Glue Adhesive System, Industrial Grade



- Dries Clear
 - Easy To Sand Within 60 Seconds
 - Sold by the each
- NOTE: Activator (FC2P10SOLOACT) Sold Separately.

Item #	Description	Size
Adhesives & Activator		
FC2P10THIN10	Thin Adhesive	10 oz. bottle
FC2P10MED10	Medium Adhesive	10 oz. bottle
FC2P10THK10	Thick Adhesive	10 oz. bottle
FC2P10JEL10	Jel Adhesive	10 oz. bottle
FC2P10SOLOACT	Activator	12 oz. aerosol
Accessories (Sold by the pack)		
FC2P10-TIPPK	Repl cap with steel pin	3 tips/pack
FC2P10-XTIP	2.25" Tip, Trimmable	1 tip/pack
FCMICRO	Microtip for precision application	25 tips/pack



Two Part Instant Glue Adhesive System, Industrial Grade



- Thick adhesive for use on porous surfaces such as particle board
- Kit includes (1) 12 oz. spray activator and (1) 2 oz. thick adhesive

Item #	Description
FC2P10SOLO	Semi-Production Kit

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A GLUE BOTTLES & APPLICATORS

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



4 oz. 16 oz. Cylinder 16 oz. Boston



Pint Quart

Glue Bottles and Caps


- For convenience in emptying larger containers into easy-to-use, one-hand grip size plastic bottle for workbench use
- Sold by the each



Size	Bottle Item #	Cap Item #	Bottle / Cap Item #
4 oz	INDB358	INDL411	-
16 oz Cylinder	INDB212	INDL418	-
16 oz Boston	INDB204/28-410	INDL415/28-410	-
Pint	-	-	YYGBPT
Quart	-	-	YYGBQT
Repl Cap for YY Bottles	-	YYC	-

Glue Applicators, Drip Proof

- 2 chamber system pushes glue from bottom up, to allow glue to flow on vertical surfaces
- Uses glue from the bottom first, no more old, clumpy glue at the bottom
- Unused glue is sucked back into the bottle - no runs, no clogged tip

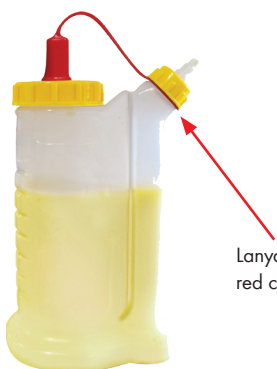


Lanyard to keep red cap close

Item #	Description	Size
4 oz. Babe-Bot and Accessories		
FCBABBOT	4 oz. Applicator	4 oz.
FCBBBT	BabeBot Blade Tips	5 Pack
FCBBLID	BabeBot Lid and Ring	5 Pack
FCBBRC	BabeBot Red Caps	5 Pack
FCBBYT	BabeBot Yorker Tips	5 Pack
16 oz. Glu-Bot and Accessories		
FCGLUBOT	16 oz. Applicator	16 oz.
FCGBBT	Glu-Bot Blade Tips	5 Pack
FCGBGUIDE	Glu-Bot Guide	5 Pack
FCGBLID	Glu-Bot Lid and Ring	1 each
FCGBYT	Glu-Bot Yorker Tips	5 Pack

HOT-MELT GLUES & APPLICATORS

Scotch-Weld™ Hot-Melt Applicators For Woodworking

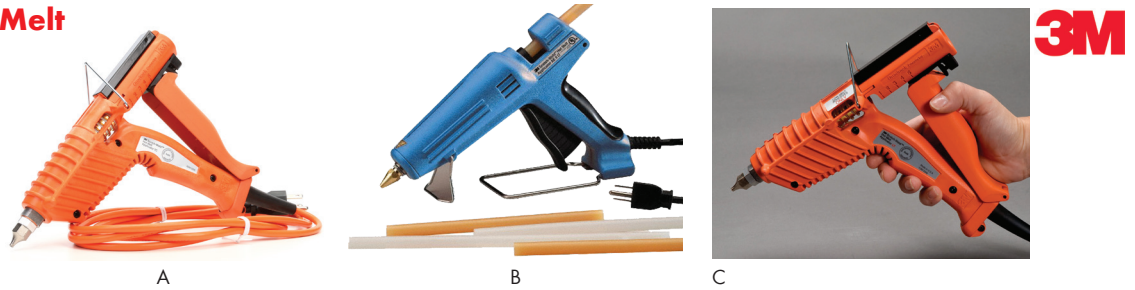

Item #	Weight	Output	Temp.	Power (120V)	Features	Required Adhesive	
High Temp Glue Guns							
A	MGPBTC	13.8 oz	3.5 lb. per hour	385° F	150W	<ul style="list-style-type: none"> Economical glue gun includes palm trigger for continuous operation and smoother beads; also easier for use with smaller hands. Uses 3M "Quadrack" adhesives Warranty: 12 months 	MGJM3792Q MGJM3738Q MGJM3747Q
B	MGHMAEII	20 oz	4 lb. per hour	400° F	100W	<ul style="list-style-type: none"> Built in stand and anti-tip guard help keep applicator upright and ready to grip. Contoured grip and wide trigger for operator comfort. Uses 3M "AE" adhesives Warranty: 6 months 	MGHM3792 MGJM3762AE
Low Temp Glue Guns							
C	MGHMLTP	13.8 oz	2.6 lb. per hour	265° F	150W	<ul style="list-style-type: none"> Lightweight and easy to use Palm trigger improves ergonomic comfort Includes Quadrack converter Uses 3M LM (Low Temp) adhesives Warranty: 12 months 	MGJM3792LMQ-8

3M™ Scotch-Weld™ Hot Melt Glue Sticks

*Sold by the pound (multiples of 11); all others sold by the box of 11 lbs.

Item #	Type	Dia.	Len.	Color	Description
High Temp Glue Sticks					
MG3792	Quad	5/8"	2"	Clear	Applications: Multi-purpose adhesive; for wood, corrugated materials, fabric, furniture, upholstery and other lightweight materials. Benefits: Good adhesion to wood; 40 second open time.
MGJM3792Q	Quad	5/8"	8"	Clear	
MGHM3792	AE	1/2"	12"	Clear	
MGJM3762AE*	AE	1/2"	12"	Tan	Applications: General purpose adhesive commonly used for bonding wood, paper, and cardboard. Securely bonds lightly waxed surfaces that may be difficult for tape to seal. Benefits: Good "hot tack", quick grab for packaging and woodworking; 30 second open time.
MGJM3738Q	Quad	5/8"	8"	Tan	Applications: For wood bonding, corrugated products, and selected plastics and cardboard. Benefits: High delivery rate and 50 second open time.
MGJM3747Q*	Quad	5/8"	8"	Tan	Applications: Commonly used for bonding wood, metal, rigid vinyl, laminate and acrylics. Benefits: Good heat resistance to prevent pop-open during transit or storage and 45 second open time.
MG82598	PG	1"	3"	Clear	Applications: Bonds variety of plastics including polycarbonate, polyethylene, and Polypropylene. Benefits: Flexible at low temperatures.
Low Temp Glue Sticks					
MGJM3792LMQ-8*	LM	5/8"	8"	Clear	Applications: Multi-purpose for wood, coated paper, polyolefins and other heat sensitive materials. Benefits: Good heat resistance to prevent pop-open during transit or storage; 40 sec. open time.

A INFINITY BOND PUR ADHESIVE SYSTEM

B Infinity Bond PUR Adhesive System



C Replacing the Titebond HiPURformer glue system, Infinity Bond offers an incredibly unique system for cord free, cost effective dispensing of high strength polyurethane hot melt. Cartridges are available in three different formulas to meet the needs of almost any application that requires a fast, strong, permanent bond.



Infinity PUR Adhesive Applicator for 50 Gram Cartridges

- Includes gun, plunger, and base
- Adhesive cartridges sold separately
- Fast, reliable PUR hot melt dispensing

Item #
INF1361



Infinity PUR WW30 Polyurethane Hot Melt 50 Gram Cartridge

- 30 second set time
- Designed for bonding wood to wood
- Fast set time reduces need for pins, staples, or sanding of putty
- 100% solids with no VOCs

Item #
INF1301



Infinity PUR WW60 Polyurethane Hot Melt 50 Gram Cartridge

- 60 second set time
- Formulated for indoor or outdoor use
- Great for bonding wood and other wood composite materials
- So strong it can replace screws, staples, nails and other fasteners

Item #
INF1311



Infinity PUR MP75 Polyurethane Hot Melt 50 Gram Cartridge

- 75 second set time
- Designed for use on wood, melamine, metals and most plastics
- Waterproof, making it ideal for interior and exterior projects
- UV indicator to allow easier visibility under black lights

Item #
INF1321

FLAMMABLE BULK CONTACT ADHESIVES



Economy Flammable Spray Grade

- Excellent room temp contactability, green strength and high heat resistance
- Excellent sprayability
- For flat work only



Item #	Size	Color
WRG159C-05	5 Gal	Clear
WRG159C-54	54 Gal	Clear
WRG158R-05	5 Gal	Red
WRG158R-54	54 Gal	Red



Premium Flammable Spray Grade

- High performance - excellent initial tack and bond strength
- Excellent room temp contactability, green strength and heat resistance
- Postformable
- Provides good uniform coverage in hand and automatic spray applications
- Excellent sprayability



Item #	Size	Color
WRG156C-05	5 Gal	Clear
WRG156C-54	54 Gal	Clear
WRG155R-05	5 Gal	Red
WRG155R-54	54 Gal	Red



CAL Compliant Flammable Spray Grade

- VOC free
- Fast-drying
- High initial tack
- High green strength
- Long open time
- CAL & OTC Compliant



Item #	Size	Color
WRG270C-05	5 Gal	Clear
WRG270R-05	5 Gal	Red
WRG270R-54	54 Gal	Red



Low VOC Flammable Spray Grade

- High bond strength
- High solids means extended mileage
- Fast drying and high heat resistance
- Low VOC
- OTC Compliant



Item #	Size	Color
WRG268C-05	5 Gal	Clear
WRG268C-54	54 Gal	Clear
WRG268R-05	5 Gal	Red
WRG268R-54	54 Gal	Red

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A FLAMMABLE BULK CONTACT ADHESIVES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Flammable Brush & Roll Grade

- Excellent room temperature contactibility, green strength and heat resistance
- Spreads easily and provides good uniform coverage
- Postformable
- Fast drying formula



Item #	Size	Color
WRG140C-1	1 Gal	Clear
WRG140C-5	5 Gal	Clear



Flammable Spray Grade, Premium 19% Solids, Postformable



- High solids contact adhesive allows faster line speeds on laminating lines
- High heat resistance; low odor, suitable for most postform applications
- Technical Info: Open Time: 20 minutes, Dry Time: 3-5 minutes based on conditions

Item #	Color	Container Size
MGPB938C-05	Clear	5 Gallon Pail
MGPB938C-55	Clear	55 Gallon Drum
MGPB938R-05	Red	5 Gallon Pail
MGPB938R-55	Red	55 Gallon Drum



Flammable Spray Grade, Premium 21% Solids, Postformable



- Designed for versatility - high green strength and high strength bonds, excellent heat resistance
- Provides extremely easy and uniform coverage in all types and sizes of operations
- Excellent hand spray contact bond adhesive with superior initial spot grab and combinability
- Similar to Helmitin 4560 & Wilsonart 800/801
- Technical Info: Open Time: 1 hour, Dry Time: 2-5 minutes based on conditions

Item #	Color	Container Size
STPS156-05C	Clear	5 Gallon Pail
STPS156-55C	Clear	52 Gallon Drum
STPS155-05R	Red	5 Gallon Pail
STPS155-55R	Red	52 Gallon Drum

FLAMMABLE BULK CONTACT ADHESIVES



Economy Flammable Spray Grade

- Excellent room temp contactability, green strength and high heat resistance
- Excellent sprayability
- For flat work only



Item #	Size	Color
FGF159M-05C	5 Gal	Clear
FGF159M-54C	54 Gal	Clear
FGF158M-05R	5 Gal	Red
FGF158M-54R	54 Gal	Red



Premium Flammable Spray Grade, Postform

- High performance - excellent initial tack and bond strength
- Excellent room temp contactability, green strength and heat resistance



Item #	Size	Color
FGF156-05C	5 Gal	Clear
FGF156-54C	54 Gal	Clear
FGF155-05R	5 Gal	Red
FGF155-54R	54 Gal	Red



Platinum Flammable Spray Grade

- High solids, high performance
- Postformable in manual and heated spray systems
- Lower applied cost



Item #	Size	Color
FGHSPLUS-05C	5 Gal	Clear
FGHSPLUS-5R	5 Gal	Red
FGHSPLUS-54C	54 Gal	Clear



Flammable Spray Grade, Premium 18% Solids, Postform

- High performance - excellent initial tack and bond strength
- Excellent room temperature contactability, green strength and heat resistance



Item #	Color	Container Size
FG151-05C	Clear	5 Gallon Pail
FG151-54C	Clear	54 Gallon Drum
FGF150-05R	Red	5 Gallon Pail

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A FLAMMABLE BULK CONTACT ADHESIVES



CAL Compliant Flammable Spray Grade

- VOC free
- Fast-drying
- High initial tack
- High green strength
- Long open time
- CAL & OTC Compliant



Item #	Size	Color
FG270-05G	5 Gal	Green
FG270-54G	54 Gal	Green

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



OTC Compliant Flammable Spray Grade

- High bond strength
- High solids means extended mileage
- Fast drying and high heat resistance
- Low VOC
- OTC Compliant



Item #	Size	Color
FG268B-05C	5 Gal	Clear
FG268B-54C	54 Gal	Clear
FG268-05R	5 Gal	Red
FG268BR-54R	54 Gal	Red



Flammable Brush Grade

- Excellent room temperature contactability, green strength and heat resistance
- Spreads easily and provides good uniform coverage
- Postformable
- Spreads easily and provides uniform coverage
- Fast drying formula



Item #	Size	Color
FGF140-01C	1 Gal	Clear
FGF140-05C	5 Gal	Clear
FGF140-54C	54 Gal	Clear

FLAMMABLE BULK CONTACT ADHESIVES



LB25 High Temp Sprayable Contact Adhesive



- High heat resistance
- No ODS (Ozone Depleting Substances)
- Quick dry time with long open time
- Bonds to nearly any surface
- Excellent Green strength
- No chlorinated solvents

Item #	Size	Color
QGALB25C-1G	1 Gal	Clear
QGALB25C-5G	5 Gal	Clear
QGALB25C-54G	54 Gal	Clear

Item #	Size	Color
QGALB25R-5G	5 Gal	Red
QGALB25R-54G	54 Gal	Red



LB28 High Temp Brush Grade Contact Adhesive



- High heat resistance
- No ODS (Ozone Depleting Substances)
- Quick dry time with long open time
- Excellent Green strength
- VOC free
- OTC Compliant

Item #	Size	Color
QGALB28C-1G	1 Gal	Clear
QGALB28C-5G	5 Gal	Clear



C307 CA Compliant Sprayable Contact Adhesive



- Good heat resistance
- High strength, long-term bond
- OTC Compliant
- Low VOC California Compliant
- No urea formaldehyde added

Item #	Size	Color
QGAC307C-5G	5 Gal	Clear
QGAC307C-54G	54 Gal	Clear

Item #	Size	Color
QGAC307R-5G	5 Gal	Red
QGAC307R-54G	54 Gal	Red



C313 CA Compliant Pebble Spray Contact Adhesive



- Low-profile pebbly spray contact adhesive with good temp resistance
- Low VOC California Compliant
- No ODS (Ozone Depleting Substances)
- Reduces adhesive telegraphing
- Versatile adhesive, bonding to nearly any surface

Item #	Size	Color
QGAC313C-5G	5 Gal	Clear

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A NON-FLAMMABLE BULK CONTACT ADHESIVES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Low VOC Non-Flammable Spray Grade

- OTC and Green Diamond Compliant
- VOC free
- Excellent green strength and high heat resistance
- High solids means extended mileage



Item #	Size	Color
WRG171C-05	5 Gal	Clear
WRG171C-54	54 Gal	Clear

Item #	Size	Color
WRG170G-05	5 Gal	Green
WRG170G-54	54 Gal	Green



Non-Flammable Brush & Roll Grade

- High pressure laminate adhesive for porous and nonporous surfaces
- Excellent green strength and high heat resistance
- Postformable
- Contains no ozone depleters
- Spreads easily and provides uniform coverage
- OTC Compliant



Item #	Size	Color
WRG100C-1	1 Gal	Clear
WRG100C-5	5 Gal	Clear



Waterbased Roll/Brush/Spray Grade

- OTC & CAL Compliant
- Low VOC content
- Excellent for bonding laminate, wood, metal and plastics
- Postformable
- Excellent room temperature contactability
- Provides good uniform coverage in manual and automatic spray applications
- Film changes color - indicates when dry



Item #	Size	Color
WRG180C-1	1 Gal	Clear
WRG180C-05	5 Gal	Clear

Item #	Size	Color
WRG180G-05	5 Gal	Green
WRG180G-55	55 Gal	Green



Non-Flammable Low VOC Neoprene Spray Grade

- Excellent room temperature contactability
- Excellent green strength and high heat resistance
- VOC Free
- Non-ozone depleting
- OTC Compliant
- Postformable



Item #	Size	Color
WRG120C-5	5 Gal	Clear

NON-FLAMMABLE BULK CONTACT ADHESIVES



OTCNF Non-Flammable Spray Grade



- OTC and Green Diamond Compliant
- VOC free
- Excellent green strength and high heat resistance
- Non-ozone depleting

Item #	Size	Color
FGF171-05C	5 Gal	Clear
FGF171-54C	54 Gal	Clear

Item #	Size	Color
FGF170-05G	5 Gal	Green
FGF170-54G	54 Gal	Green



S100 Non-Flammable Brush Grade



- High pressure laminate adhesive for porous and nonporous surfaces
- Excellent green strength and high heat resistance
- Postformable
- Contains no ozone depleters
- Spread easily and provides uniform coverage
- OTC Compliant

Item #	Size	Color
FGF100S-01C	1 Gal	Clear
FGF100S-05C	5 Gal	Clear



Waterbased Roll/Brush/Spray Grade



- OTC & CAL Compliant
- Low VOC content
- Excellent for bonding laminate, wood, metal and plastics
- Postformable
- Excellent room temperature contactability
- Provides good uniform coverage in hand and automatic spray applications
- Film changes color - indicates when dry

Item #	Size	Color
FGF180-01C	1 Gal	Clear
FGF180-05C	5 Gal	Clear



C300 Non-Flam High Solids Contact Adhesive



- Designed for laminate and general bonding to many substrates
- Bonds metals, plastics, wood, rubber, and porous or non-porous surfaces
- Fast drying with long open time
- Good initial tack
- Excellent coverage

Item #	Size	Color
QGAC300-5G	5 Gal	Clear
QGAC300C-54G	54 Gal	Clear

Item #	Size	Color
QGAC300G-5G	5 Gal	Green
QGAC300G-54G	54 Gal	Green

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A FLAMMABLE & NON-FLAMMABLE CANISTER ADHESIVES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Premium Hi-Temp Non-Flam/Flam Canister



- High bond strength
- Fast drying with high heat resistance
- Excellent room temperature contactability
- Permanent bond of materials where immediate bond strength and good heat resistance are required
- Non-flammable adhesive/Flammable propellant

Item #	Size	Color
WRG200C-11	11 Lb	Clear
WRG200C-38	38 Lb	Clear
WRG200C-177	177 Lb	Clear
WRG200C-355	355 Lb	Clear
WRG200G-38	38 Lb	Green
WRG200G-177	177 Lb	Green
WRG200R-38	38 Lb	Red
WRG200R-177	177 Lb	Red
WRG200R-355	355 Lb	Red



Flam/Flam Canister



- HAPs free
- Non-Methylene Chloride
- Excellent room temperature contactability
- Excellent green strength and high heat resistance

Item #	Size	Color
WRG202C-30	30 Lb	Clear



CAL Compliant Flam/Flam Canister



- OTC & CAL Compliant
- Low VOC
- Soft spray allows for greater control of pattern and reduces telegraphing
- High solids means extended mileage
- Excellent heat resistance and bond strength

Item #	Size	Color
WRG270C-27	27 Lb	Clear
WRG270C-128	128 Lb	Clear
WRG270R-27	27 Lb	Red

FLAMMABLE & NON-FLAMMABLE CANISTER ADHESIVES



CAL Compliant Flammable Air Assisted Canister



- Designed to be used with a traditional spray gun for complete adjustability in the spray pattern
- OTC & CAL Compliant
- Low VOC
- High solids means extended mileage
- Excellent heat resistance and bond strength

Item #	Size	Color
WRG270C-AC-27	27 lb	Clear



Low VOC Non-Flam/Non-Flam Canister



- OTC Compliant and Green Guard certified
- VOC free
- Excellent high heat resistance
- Pebble spray pattern

Item #	Size	Color
WRG200NFG-35	35 Lb	Clear
WRG200NFG-162	162 Lb	Green
WRG200NFG-326	326 Lb	Green



Canister Guns, Hoses & Accessories



- For use with canister adhesives
- Items sold separately

Item #	Description
WRGHOSE-12	12' Canister Hose
WRGHOSE-18	18' Canister Hose
WRGHOSE-25	25' Canister Hose
WRGSPRAYGUN	Adjustable Spray Gun with 6501 Tip
WRGTIP-6501	6501 Spray Tip - 65° Fan
WRGTIP-9501	9501 Spray Tip - 95° Fan
WRGHOSE-SPLT	T-Fitting for 2 Lines on Jumbo Canister



A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A FLAMMABLE & NON-FLAMMABLE CANISTER ADHESIVES

Hi-Temp Premium Non-Flam/Flam Canister


- High bond strength
- Fast drying with high heat resistance
- Excellent room temperature contactability
- Permanent bond of materials with immediate bond strength and good heat resistance
- Non-flammable adhesive

Item #	Size	Color
FG200-11C	11 Lb	Clear
FG200-038C	38 Lb	Clear
FG200-177C	177 Lb	Clear
FG200-355C	355 Lb	Clear
FG200-038G	38 Lb	Green
FG200-177G	177 Lb	Green
FG200-355G	355 Lb	Green
FG200-038R	38 Lb	Red
FG200-177R	177 Lb	Red
FG200-355R	355 Lb	Red


CAL Flam/Flam Canister


- OTC & CAL Compliant
- Low VOC
- Soft spray allows for greater control of pattern and reduces telegraphing
- High solids means extended mileage
- Excellent heat resistance and bond strength

Item #	Size	Color
FG270-27C	27 Lb	Clear
FG270-128C	128 Lb	Clear
FG270-252C	252 Lb	Clear
FG270-27R	27 Lb	Red
FG270-128R	128 Lb	Red
FG270-250R	252 Lb	Red

FLAMMABLE & NON-FLAMMABLE CANISTER ADHESIVES



OTCNF Non-Flam/Non-Flam Canister



- Green Guard certified
- VOC free
- Excellent high heat resistance
- Pebble spray pattern
- Non-flammable adhesive/Non-flammable propellant

Item #	Size	Color
FGF268NF-035C	35 Lb	Clear
FGF268NF-162	162 Lb	Clear
FGF268NF-326C	326 Lb	Clear
FGF268NF-35G	35 Lb	Green
FGF268NF-162G	162 Lb	Green
FGF268NF-326G	326 Lb	Green



Canister Guns, Hoses & Accessories



- For use with canister adhesives
- Items sold separately

Item #	Description
FGJJC6102	12' Canister Hose
FGJJC6103	18' Canister Hose
FGJJC6104	25' Canister Hose
FGJJC6106	Adjustable Spray Gun with 6501 Tip
FGJJC6105	6501 Spray Tip for PRO HITEMP & OTCNF Canisters
FGJJC6108	9501 Spray Tip for PRO OTC Canisters
FGJJC6111	T-Fitting for 2 Lines on Jumbo Canister
FGJJC6118	Formica® Spray Tip 680



High Temp Canister Non-Flammable Adhesive; Flammable Propellant

STA'-PUT

- Can be used on many porous and non-porous surfaces where a permanent bond is required
- Quick dry time, aggressive grab tack and high green strength
- For use in flatwork applications (non-postforming)
- Similar to Helmitin 1685
- Technical Info: Open Time: 30 minutes, Dry Time: 2-5 minutes based on conditions

Item #	Color	Canister Size
STPS20038G	Red	38 lb.

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A FLAMMABLE & NON-FLAMMABLE CANISTER ADHESIVES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



P300 High Temp General Purpose Contact Adhesive



- Non-flammable solvent contact adhesive with high heat resistance
- High strength, long-term bond
- Versatile adhesive that bonds to nearly any surface
- Fully portable system
- 2-sided application

Item #	Size	Color
QGAP300C-7L	7 Liter	Clear
QGAP300C-22L	22 Liter	Clear
QGAP300C-108L	108 Liter	Clear
QGAP300C-216L	216 Liter	Clear

Item #	Size	Color
QGAP300G-22L	22 Liter	Green
QGAP300R-22L	22 Liter	Red
QGAP300R-108L	108 Liter	Red
QGAP300R-216L	216 Liter	Red



P302 Non-Flam High Temp Contact Adhesive



- Non-flammable and VOC free
- Excellent high coverage
- High tack, fast drying with long open time
- Good heat resistance
- 2-sided application

Item #	Size	Color
QGAP302B-22L	22 Liter	Blue
QGAP302B-108L	108 Liter	Blue
QGAP302B-216L	216 Liter	Blue

Item #	Size	Color
QGAP302C-22L	22 Liter	Clear



P307 CA Compliant Low VOC Contact Adhesive



- Excellent bonding to porous surfaces
- Adheres to nearly any surface
- Good heat resistance
- Low VOC California Compliant
- High strength, long-term bond

Item #	Size	Color
QGAP307C-7L	7 Liter	Clear
QGAP307C-22L	22 Liter	Clear
QGAP307C-108L	108 Liter	Clear

Item #	Size	Color
QGAP307R-22L	22 Liter	Red
QGAP307R-108L	108 Liter	Red



P313 Low VOC Pebble Spray Contact Adhesive



- Post-formable
- Lower profile spray reduces telegraphing
- HAPS free
- No ODS (Ozone Depleting Substances)
- OTC Compliant

Item #	Size	Color
QGAP313R-22L	22 Liter	Red

TENSOR GRIP ADHESIVE ACCESSORIES



M120 Adjustable Spray Gun

- Heavy duty and built to last through steady industrial use
- Compatible with all Tensor spray tips and suitable for every industry



Item #	Description
QGAM120	Adjustable Spray Gun



M125 Wand Spray Gun

- Extend your reach and cut down on application time with a wide fan web spray
- Suitable for most web spray products
- Best for applications where bending over or reaching is required



Item #	Description
QGAM125	18" Wand Spray Gun



M130 Flexible Rubber Hose

- Standard rubber hose is designed for use in heavy industrial situations
- Maintains excellent flexibility and durability even through rigorous daily use



Item #	Description
QGAM130-12	12' Flexible Rubber Hose
QGAM130-18	18' Flexible Rubber Hose
QGAM130-25	25' Flexible Rubber Hose



M180 White Flexible Hose

- Designed specifically for Zero-Flam technology products



Item #	Description
QGAM180-12	12' White Flexible Hose
QGAM180-18	18' White Flexible Hose
QGAM180-25	25' White Flexible Hose



1



2



3



4



5



6

Spray Tips & Splitters



	Item #	Description
1	QGAM300	Canister Splitter Valve
2	QGAM201	Ultimate Brass 60° Spray Tip
3	QGA11001B	Brass Spray Tip
4	QGA110015B	Brass Spray Tip (G67)
5	QGA6501B	Brass Spray Tip 65° (Not pictured)
6	QGA9501B	Brass Spray Tip 95° (Not pictured)

A SOLVENTS / CLEANERS / REDUCERS

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Flammable Solvent/Cleaner/Reducer



- Fast drying and non-ozone depleting
- Recommended for thinning and cleaning most spray adhesives
- Can also be used for cleaning brushes and rollers, and for flushing through spray lines and spray guns
- Flammable thinner/solvent should only be used with flammable adhesives

Item #	Size	Color
WRGSOLVENT-1	1 Gal	Clear
WRGSOLVENT-5	5 Gal	Clear



Non-Flammable Solvent/Cleaner/Reducer



- A clear non-flammable solvent recommended for thinning and cleaning most non-flammable adhesives.
- Can also be used for cleaning brushes, rollers, equipment parts and for flushing through spray lines and spray guns
- Fast drying
- Non-ozone depleting
- Contaminant free
- OTC Compliant

Item #	Size	Color
WRGSOLVENT-NF-5	5 Gal	Clear



Flammable Solvent/Cleaner/Reducer



- Fast drying and non-ozone depleting
- Recommended for thinning and cleaning most spray adhesives
- Also used for cleaning brushes and rollers, and for flushing through spray lines and spray guns
- Flammable thinner/solvent should only be used with flammable adhesives

Item #	Size	Color
FG689-05	5 Gal	Clear
FG689-54	55 Gal	Clear



Non-Flammable Solvent/Cleaner/Reducer



- A clear non-flammable solvent recommended for thinning and cleaning most non-flammable adhesives
- Can also be used for cleaning brushes, rollers, equipment parts and for flushing through spray lines and spray guns
- Fast drying
- Non-ozone depleting
- Contaminant free
- OTC Compliant

Item #	Size	Color
FG1000-05	5 Gal	Clear
FG1000-55	55 Gal	Clear

AEROSOL CONTACT ADHESIVES



Premium HiTemp Aerosol Adhesive



- Designed for professional use
- Combines ease of use with very high strength, quick tack and dry time
- High solids and high temperature

Item #	Size	Color
WRG200C-AA	15.75 oz	Clear
WRG200R-AA	15.75 oz	Red



CAL Compliant Aerosol Adhesive



- CAL & OTC Compliant
- Excellent adhesion to a variety of substrates including, but not limited to laminates, particle board, plywood, hardwood, leather, rubber and metal
- High solids means extended mileage
- Soft spray allows for greater control of pattern and application rates

Item #	Size	Color
WRG270C-AA	13 oz	Clear



Spray Contact Adhesive



- Suitable for bonding leather, cloth, cardboard, most plastics, and wood
- Bonds porous substrates while maintaining a high level of tack
- 50 state compliant
- Heat resistant up to 200° F
- Very aggressive, high tack adhesive
- High strength, long term bonding
- Single side application
- HAPS and Silicone Free

Item #	Size	Color
WR0893100910	22 oz	Clear



Multi-Purpose Spray



- Premium aerosol contact adhesive
- High temperature, high strength, quick dry time

Item #	Can Size	Color
FG200AA-15C	15.75 oz	Clear
FG200AA-15R	15.75 oz	Red

A AEROSOL CONTACT ADHESIVES

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



PG107 Permagrip Aerosol Contact Adhesive



- High temperature, high performance contact cement
- Web spray, fast grab, excellent adhesion to a large variety of substrates

Item #	Size	Color
CBPG-107-AA	15.75 oz.	Natural



CBA-270 Aerosol Contact Adhesive



- OTC & Cal Compliant
- Excellent adhesion to a variety of substrates
- High solids means extended mileage
- Soft spray allows for greater control of pattern and application rates

Item #	Size	Color
CBA-270-AA	13 oz.	Natural



P300 High Temp General Purpose Aerosol Contact Adhesive



- Non-flammable solvent contact adhesive with high heat resistance
- High strength, long-term bond
- Versatile adhesive that bonds to nearly any surface
- Excellent Green strength
- 2-sided application

Item #	Size	Color
QGAP300C-AA	22 oz. Aerosol	Clear
QGAP300R-AA	22 oz. Aerosol	Red



P307 CA Compliant Low VOC Contact Adhesive



- Excellent bonding to porous surfaces
- Adheres to nearly any surface
- Good heat resistance
- Low VOC California Compliant
- High strength, long-term bond

Item #	Size	Color
QGAP307C-AA	22 oz. Aerosol	Clear

AEROSOL CONTACT ADHESIVES



P322 Fast Dry Pressure Sensitive Aerosol Adhesive

- Very fast drying
- Long lasting high tack (pressure sensitive)
- Moisture and weather-resistant bond
- Will not attack polystyrene
- No ODS (Ozone Depleting Substances)



Item #	Size	Color
QGAP322G-AA	22 oz. Aerosol	Green



P329 CA Compliant Pressure Sensitive Aerosol Adhesive

- California Compliant
- Low VOC
- HAPS Free
- Very aggressive, high tack adhesive
- No ODS (Ozone Depleting Substances)



Item #	Size	Color
QGAP329C-AA	22 oz. Aerosol	Clear



G67 Water-Based Pressure Sensitive Flooring Aerosol Adhesive

- Non-flammable water-based pressure sensitive adhesive
- Zero VOC
- California Compliant
- Excellent adhesion on most carpet tiles and LVT/LVP/VCT
- Repositionable during installation



Item #	Size	Color
QGA67W-AA	22 oz. Aerosol	White



S101 Citrus Cleaner/Adhesive Remover

- Cleans hoses, spray guns and other adhesive equipment
- Exceptional cleaning/degreasing power
- Pleasant citrus scent
- Safer than most comparable cleaners
- Compatible with most plastics



Item #	Size	Color
QGAS101-AA	22 oz. Aerosol	Clear
QGAS101-7L	7 Liter	Clear
QGAS101-5G	5 Gal	Clear

AEROSOL CONTACT ADHESIVES

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Multi-Purpose Spray Fast Drying Formula



- High tack, high coverage and fast drying, bonds in 15 seconds
- For permanently attaching foils, carpeting, lightweight foams, paper, cardboard, felt and, cloth to painted or unpainted metals, wood and hardboard
- Low VOC, does not contain ozone-depleting CFCs

Item #	Can Size	Color
MG77	16.75 oz	Clear



Multi-Purpose Spray High Strength, Fast Bond



- Can be used to attach decorative laminates to wood, plastic and metal
- Permanent bond that holds firmly and dries in one minute
- Fast contact strength buildup for many decorative laminates
- Low VOC version meets CARB/OTC VOC requirements and helps contribute to LEED credits

Item #	Can Size	Color
MG90	17.6 oz	Clear
MG90-CA	19 oz	Clear



Woodworking Spray Adhesive



- Economical high strength, fast grabbing, industrial grade, lace spray aerosol adhesive
- Forms powerful, permanent bonds in woodworking and other applications. Bonds laminates, plastics, rubber and more

Item #	Can Size	Color
MG07861	13.8 oz	Clear



Double Sided Tape



- Adheres like contact cement
- Increases in strength as it cures
- Sold by the roll

Item #	Width	Length	Application
FCST1X50	1"	50'	Edgebanding
FCST1.5X50	1-1/2"	50'	Countertop Edges, Faceframes
FCST2X50	2"	50'	Faceframes
FCST6.5X50	6"	50'	Large applications of laminate, such as shelving

EDGEbanding ADHESIVES



Cartridge Form, Unfilled



- Unfilled adhesive benefits:
 - Formulated for use in Holz-Her® edgebanding machines
 - Cleaner running; glue pot stays clean longer
 - Used on a wide variety of substrates
 - Good coverage
- 48 cartridges per pack

Item #	Color	Description	Applications	Technical Info
ADJOW286.30	Natural	High heat resistance and good cold flexibility; excellent color and heat stability in the melt	Solid wood, veneer, primed HPL, PVC and resinated paper edgebands	Viscosity: 95,000 at 356°F; 70,000 at 374°F; 50,000 at 392°F Softening Point: 221 ° F Application Temperature: 356-392°F Feed Speed: 30 - 180 ft./min.



Cartridge Form, Filled



- Filled adhesive benefits:
 - Formulated for use in Holz-Her® edgebanding machines
 - Very good adhesion with PVC, wood and laminates
 - Good running properties
 - High bond strength
 - High coverage - most commonly used
- WO" are 45 cartridges per box; "AD" are 35 lbs. per box
- *Items with † are available as single cartridge. Add "-1" to end of item number.

Item #	Color	Description	Applications	Technical Info
Low Viscosity				
WOHKP21NT WOHKP21WH†	Natural White	Specially formulated for Holz-Her® automatic edgebanding machines. The viscosity, spread and flow characteristics will not clog or block the application nozzles on the glue head	PVC, ABS, Veneer, Polyester, Melamine, Solid Wood & HPL	Viscosity: 55,000 at 392°F Softening Point: 227° F Application Temp: 392-428° F Feed Speed: 30 ft/min.
Medium Viscosity				
WOHKP25BK-1 WOHKP25BN† WOHKP25NT† WOHKP25WH†	Black Brown Natural White	Specially formulated for Holz-Her® automatic edgebanding machines. The viscosity, spread and flow characteristics will not clog or block the application nozzles on the glue head	PVC, ABS, Veneer, Polyester, Melamine & Solid Wood	Viscosity: 90,000 at 392°F Softening Point: 227° F Application Temp: 392-428° F Feed Speed: 40 ft/min.
Medium / High Viscosity				
ADJOW286.80 ADJOW286.81 ADJOW286.83	Natural White Black	Hot melt for HOLZ-HER cartridge edgebanders. Good adhesion especially to primed HPL; good color and heat stability in the melt	Suitable for primed HPL, solid wood, veneer, PVC and resinated paper edgebands	Viscosity: 110,000 at 356°F, 85,000 at 374°F, 60,000 at 392°F Softening Point: 212° F Application Temp: 356-392°F Feed Speed: 30-120 ft/min.

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A EDGEBANDING ADHESIVES



Transparent

Natural

Thermomelt™ 100 Cartridge



Each Thermomelt 100 cartridge has a protective film coating permanently attached, providing many benefits:

- Protects cartridges from shop dust, keeping your adhesives and machines clean and dust free
- Acts as a lubricant in the machine’s hopper, providing problem free melting and increased performance from your edgelanding
- Prevents cartridges from sticking together in storage
- Aid in cleaning/lubricating machine for use, keeping the edgelanding in top condition

Specifications:

- Machine types: Specially formulated for Holz-Her edgelanding; the flow will not clog or block the application nozzles on the glue head
- Bonding edges: HPL, Epoxy resin, ABS, Solid wood, Polyester, PVC and Veneer edges
- Base: EVA Copolymer
- Speed: 8 - 2-m/min., (26 - 65ft/min.) depending on machine
- Working Temp: 200 - 220°C (392 - 428°F)
- Viscosity: 65,000 mPas @ 200°C
- Sold by the box

Item #	Color	Qty per Box
WR089047825-TR	Transparent	33.7 lb. (45 Cartridges)
WR089047822-NT	Natural	33.7 lb. (45 Cartridges)



Thermomelt™ 300 Pellet, Natural Color



- Würth Thermomelt™ 300 edgelanding pellets are the industry’s best combination of value and performance
- Perfect choice for a variety of machines. Great bond and good post-melt capabilities
- Great for PVC, ABS and fleece backed veneer
- Transparent glue line
- Great price combined with great performance
- Packaged in 33.1 lb. boxes, no more heavy 55 lb. bags that are difficult to move and break

Specifications:

- Machine types: Works with standard and high speed straight edge banders
- Bonding: Polyester edges, Melamine resin edges, PVC, PP and ABS edges with pretreated back, Resin-impregnated paper and Massive and veneer edges
- Base: EVA Copolymer
- Speed: 20 - 40-m/min., (65 - 132 ft/min.) depending on machine
- Working Temp: 200 - 210°C (392 - 410°F)
- Viscosity: 65,000 mPas @ 200°C
- Sold by the box

Item #	Color	Weight per Box
WR089047742-NT	Natural	33.1 lb.

EDGE-BANDING ADHESIVES



Thermomelt™ 500 Pellet, Natural Color



- Würth Thermomelt™ 500 edgbanding pellets is the “workhorse” line
- Superior formulation for a wide variety of uses; great bond and re-melt capabilities
- Great for PVC, ABS and fleece backed veneer; suitable for pre-coating of edges; use with HPL if primed
- Transparent glue line; also available in a variety of colors listed below
- Packaged in 33.1 lb. boxes, no more heavy 55 lb. bags that are difficult to move or break

Specifications:

- Machine types: Works with manual, standard and high speed auto straight edge banders, CNC processing centers
- Bonding: Polyester edges, Melamine resin edges, PVC and ABS edges, Uncompressed resin-impregnated paper banding and Solid wood, veneer and Multiply edges
- Base: EVA Copolymer
- Speed: 20 - 50-m/min., (65 - 165 ft/min.) depending on machine
- Working Temp: 200 - 210°C (392 - 410°F)
- Viscosity: 80,000 mPas @ 200°C
- Sold by the box

Item #	Color	Weight per Box
WR089047792-NT	Natural	33.1 lb.



Thermomelt™ 200 Pellet, Transparent Color



- No priming necessary for strip laminate - saves you time and money - the best choice for HPL applications
- Absolutely no stringing or smearing during routing
- Suitable for difficult soft forming profile with tight radius
- Transparent with a transparent glue line
- Best choice for BAZ and contour banders
- High green strength, invisible glue line, very good re-melting properties and unbreakable bond
- Packaged in 29 lb. boxes, no more heavy 55 lb. bags that are difficult to move or break

Specifications:

- Machine types: Works with all machine types and machining centers.
- Bonding: Polyester edges, CPL and Melamine Resin edges, PVC and ABS edges and Uncompressed resin-impregnated paper edges on machining centers.
- Base: EVA Copolymer
- Speed: 10 - 30-m/min., (32 - 98 ft/min.) depending on machine
- Working Temp: 180 - 200°C (356 - 392°F)
- Viscosity: 50,000 mPas @ 200°C
- Sold by the box

Item #	Color	Weight per Box
WR089047733-TR	Transparent	29 lb.

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A EDGEBANDING ADHESIVES



Pellet Form, Filled

- Filled adhesive benefits:
 - Very good adhesion with PVC, wood and laminates
 - Good running properties
 - High bond strength and coverage
 - Most commonly used type of edgelanding adhesive
- "WO" are 55 lbs. per bag; "AD" are 44 lbs. per bag



Item #	Color	Description	Applications	Technical Info
Low Viscosity				
WOKS217NT	Natural	Multi-purpose hot melt recommended for granular feed or 'quick melt' glue systems; also performs well in standard glue pot setups. Very good wetting even on difficult edgelanding materials; produces tight joints. High final bond strength and high heat resistance.	Veneer, polyester, PVC, melamine, solid wood, ABS, tropical and oils veneers and laminates (i.e. teak and pine)	Viscosity: 55,000 at 392° F Softening Point: 221° F Application Temperature: 374-392° F Feed Speed: 40 ft./minute
ADJOW282.20	Natural	Low viscosity hot melt with fast melting properties, long open time and good color and heat stability in the melt.	For contour edgelanding of PVC, paper, and polyester at low application temperatures and at very slow feed speeds; also suitable for soffforming PVC edges	Viscosity: 60,000 at 266° F, 40,000 at 284° F, 30,000 at 302° F Softening Point: 194° F Application Temperature: 266-302° F Feed Speed: 15-60 ft/min.
Medium Viscosity				
ADJOW296.30	Natural	Very economical and excellent performance after initial melting. A medium viscosity EVA hotmelt adhesive. Good color and heat stability in the melt. Good general purpose edgelanding glue.	For edgelanding veneer, resin impregnated paper edgebands, and PVC. Good wetting and adhesion properties.	Viscosity: 120,000 at 190° F, Softening Point: Approx. 110° C (230° F) Ring & Ball Application Temperature: 190-210° C Density: 1.4 (11.5 lbs./gal.)
Medium High Viscosity				
ADJOW288.60	Natural	Economical and excellent performance after initial melting. Good resistance to high and low temperatures, good adhesion and good color stability in the melt.	For edgelanding veneer, solid wood, resin impregnated paper edgebands, PVC, ABS, and primed HPL. Can also be used for precoating and soffforming applications	Viscosity: 120,000 at 374° F, 90,000 at 392° F, 70,000 at 410° F Softening Point: 230° F Application Temperature: 374-410° F Feed Speed: 30-120 ft/min.
ADJOW288.61	White			
ADJOW288.63	Black			
High Viscosity				
WOKS208NT	Natural	Multi-purpose adhesive with fast melting properties and spread and flow characteristics that permits both standard and high feed spreads to be run without stringing. The melting characteristics of this adhesive cause less charring and oxidization in the pot and therefore result in cleaner operation.	PVC, ABS, Veneer, Polyester, Melamine	Viscosity: 130,000 at 392° F Softening Point: 230° F Application Temperature: 374-392° F Feed Speed: 50 ft./minute

EDGEBANDING ADHESIVES

Pellet Form, Filled (continued)



Item #	Color	Description	Applications	Technical Info
High Viscosity				
WOKS205NT	Natural	Premium grade adhesive has been modified with a rubber additive to provide an exceptionally strong and durable multi-purpose adhesive recommended for all straightline edgework applications. High viscosity, excellent bonding characteristics, and high heat resistance make this the ideal all-purpose edgework adhesive. The spread and flow characteristics permit both moderate and high speed applications to be run without stringing.	PVC, ABS, Veneer, Polyester, Melamine, Solid Wood & HPL	Viscosity: 150,000 at 392° F Softening Point: 248° F Application Temperature: 428-437° F Feed Speed: 40 ft./minute
WOKS205WH	White			
ADJOW288.50	Natural	High viscosity hot melt with high heat resistance and good cold flexibility of glue line. Excellent color and heat stability in the melt.	For solid wood, veneer, PVC and resinated paper edgeworks; also used for soffforming applications	Viscosity: 180,000 at 374° F; 130,000 at 392° F; 100,000 at 410° F Softening Point: 238° F Application Temperature: 374-412° F Feed Speed: 30-120 ft/min.

Pellet Form, Unfilled



Item #	Color	Description	Applications	Technical Info
High Viscosity				
ADJOW280.10	Natural	High viscosity hot melt with high heat resistance and good cold flexibility; excellent color and heat stability in the melt.	Suitable for solid wood, veneer, primed thermoplastic (PVC, ABS, PP), and resinated paper edgeworks; also used for soffforming applications (specially designed for BAZ and Combiformer machines).	Viscosity: 250,000 at 374° F, 170,000 at 392° F, 120,000 at 410° F Softening Point: 248° F Application Temperature: 374-410° F Feed Speed: 30-120 ft/min.

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A EDGEBANDING ADHESIVES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Unfilled Edgebanding Adhesives



- Medium viscosity hot melt with high heat resistance and good cold flexibility
- Applications: Suitable for solid wood, veneer, and primed thermoplastic (PVC, ABS, PP)
- **Technical Info:**
 - Viscosity: 95,000 at 356°F, 70,000 at 374°F, 50,000 at 392°F
 - Softening Point: 221 °F
 - Application Temperature: 356F - 392 °F
 - Feed Speed: roller application: 5-40 m/min (15-120 fpm)

Item #	Color	Weight per Bag
ADJOW280.30	Natural	44 lb



Unfilled Clear Melt Edgebanding Adhesives



- High viscosity hot melt high heat resistance and good cold flexibility
- Applications: Suitable for solid wood, veneer, and primed thermoplastic (PVC, ABS, PP)
- **Technical Info:**
 - Viscosity: 135,000 at 374°F, 95,000 at 392°F, 75,000 at 410°F
 - Softening Point: 221 °F
 - Application Temperature: 374-410°F
 - Feed Speed: roller application: 18-60 m/min (50-180 ft/min)

Item #	Color	Weight per Bag
ADJOW280.90	Clear	44 lb



Medium Viscosity, Pellet Form-Filled



- EVA (unfilled) hot melt with very high temperature resistance and high bond strength
- Recommended for veneer, melamine, polyester, PVC, ABS, HPL, and solid wood
- **Technical Info:**
 - Viscosity: 75,000
 - Softening Point: 110° C
 - Application Roller Temperature: 190 - 200° C
 - Feed Speed: 50 ft./minute

Item #	Color	Weight per Bag
WOKS351-CLR	Clear	55 lb



Rakoll Supermelt Plus Unfilled Edgebanding Hot Melt Adhesive



- Recommended for plastic edges, melamine, HPL, and wooden edges
- **Technical Info:**
 - Viscosity: 54,000
 - Roller Temperature: 180 - 200 °C
 - Feed Speed: 12 m/min

Item #	Color	Weight per Bag
WOSUPERMELTPUS	Clear	44 lb

EDGEBANDING ADHESIVES




Dorus® Edgelanding Primer



- PVA (water) based dispersion product suitable for priming solid woods, high pressure laminate and other difficult-to-bond edgings
- Significantly improves adhesion characteristics, even on tropical, oily and resinous woods
- Recommended Applications: Solid Wood, Veneers, HPL

Item #	Size
WOND183-1	22 lb container (approx. 2-1/2 gal.)

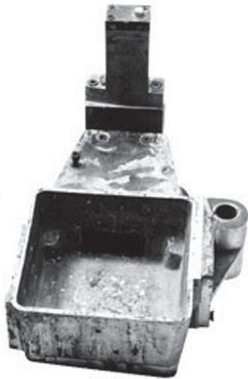

Superapid 401 Glue Pot Cleaner



- Perfect for cleaning edgelanding glue pots
- Removes residue from interior of glue pot allowing you to run at the perfect temperature
- Use as part of your regular edgelanding maintenance

Note: NOT for use with cartridge type edgelanders

Item #
ADW401

Visit us on our website: wurthlac.com

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A CONSTRUCTION ADHESIVES

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



**Industrial Strength Adhesive
Self-Leveling**



- Exceptional adhesion to wood, metal, glass, fiberglass, masonry and concrete
- Waterproof after cure
- Can be painted to match surrounding area or to make UV-resistant
- Freeze/thaw stability: Stable
- Sold by the each

Item #	Color	Size
FW220011-1	Clear	3.7 oz



**Industrial Strength Adhesive
Non-Slump Formula**



- Exceptional adhesion to wood, metal, glass, fiberglass, masonry, concrete, asphalt
- Won't sag, drip or run on vertical or horizontal applications
- Waterproof after cure
- Can be painted to match surrounding area or to make UV-resistant
- Freeze/thaw stability: Stable
- Sold by the each

Item #	Color	Size
FW252011-1	Clear	10.2 oz



DYNAGRIP® Construction Adhesive, All-Purpose



- Ideal for paneling, interior remodeling, and other interior projects
- Easy water clean-up and excellent instant grab
- Sold by the each

Item #	Color	Size
DP27501	White	10.3 oz

CONSTRUCTION ADHESIVES



Titebond® Heavy Duty Construction Adhesive



- Bonds wet, frozen and treated lumber
- Also ideal for metal, brick, concrete, ceramics and most large panel-type substrates
- Reduces the amount of nailing needed to help eliminate squeaky floors
- Freeze/thaw stability: Will not freeze

Item #	Color	Size
FR5261	Light Tan	10 oz



Titebond® Green Choice Heavy Duty Construction Adhesive



- Bonds wood, paneling, plywood, wet and frozen lumber, metal, plastics, polystyrene and polyurethane foams and more
- Interior and exterior use
- Provides a strong grab, fills gaps and irregularities
- Remains permanently flexible
- Cleans easily with water in wet state
- Highly-water resistant when dry
- Freeze/thaw stability: Stable

Item #	Color	Size
FR7471	Beige	10 oz



Titebond® PROvantage Heavy Duty Construction Adhesive



- Premium-grade formula for more demanding construction and repair projects
- Ideal for bonding wood, metal, brick, marble, ceramic tile, concrete and drywall
- Meets State and Federal VOC regulatory requirements
- Reduces the amount of nailing and can be extruded down to 0°F

Item #	Color	Size
FR5251	Brown	10 oz
FR5252	Brown	28 oz

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A ADHESIVE & LATEX CAULKS

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Adhesive Caulk, Kitchen & Bath

- Cured caulk is mildew-resistant
- Freezes/thaws stability: Stable
- Cleans up with water, paintable
- Sold by the each



Item #	Color	Size
DP18001	White	5.5 oz
DP18008	Clear	5.5 oz
DP18013	Almond	5.5 oz
DP18032	White	10.1 oz



Adhesive Caulk, Vinyl All Purpose

- Mildew and rust resistant; waterproof seal
- Freezes/thaws stability: Stable
- Paintable after approximately 1 hour
- Sold by the each



Item #	Color	Size
DP102-AM	Almond	10.3 oz
DP102-TR	Translucent	10.3 oz
DP102-WH	White	10.3 oz



Titebond® PRO-Grade Plus

- Designed for interior and exterior applications
- Ideal for back filling gaps, repairing cracks and sealing joints
- Water-resistant seal once cured
- Cleans up with water; no residual odor
- Paintable after approximately 2-4 hours
- Sold by the each



Item #	Color	Size
FR8401	White	10.1 oz



Acrylic Latex Caulk, Plus Silicone, Low VOC

- Bonds to wood, brick, glass, metal, plaster, drywall and painted surfaces
- Paintable after approximately 2 hours (fast dry approx. 40 minutes)
- Cured caulk is mildew resistant
- Freezes/thaws stability: Stable
- Water clean-up
- Sold by the each



Item #	Color	Size
DP18101	White	10.1 oz
DP18071	Clear	10.1 oz
DP18172	Antique White	10.1 oz

**35 year
Durability
Guarantee**

LATEX CAULKS & SEALANTS



Latex Sealant, Low VOC

- Ideal for caulking and sealing windows and doors, moldings, baseboards, butt and corner joints, and other gaps and cracks
- Paintable after approximately 2-4 hours
- Cured sealant is mold & mildew resistant
- Easy water clean-up; low odor
- Freeze/thaw stability: Stable
- Sold by the each



Item #	Color	Size
DP18275	White	10.1 oz



Titebond® Silicone Sealant

- Ideal for both interior and exterior applications, excellent adhesion to various construction materials including vinyl, aluminum, brick, glass and painted surfaces
- Use on construction, remodeling and repair projects - doors, windows, siding, vents, tubs, sinks and more!
- Withstands extreme temperature changes
- Not paintable; paint surfaces before sealing
- Freeze/thaw stability : Will not freeze



Item #	Color	Size
FR2601	White	10.1 oz
FR2611	Clear	10.1 oz



Silicone Sealant, 100% Silicone

- Adheres to glass, ceramic, fiberglass, porcelain, non-oily woods, canvas, most metals and plastics and painted surfaces
- All purpose indoor/outdoor use
- Not paintable; paint surfaces before sealing
- Freeze/thaw stability: Stable
- Sold by the each



**50 year
Durability
Guarantee**

Item #	Color	Size
DP08646	White	10.1 oz
DP08641	Clear	10.1 oz
DP08642	Black	10.1 oz
DP08643	Aluminum	10.1 oz
DP08649	Almond	10.1 oz

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A SILICONE SEALANTS / GLAZE COATS

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Silicone Rubber Sealant, Premium

- Premium quality, 100% silicone rubber sealant that provides outstanding durability and flexibility for a long-lasting, 100% waterproof and weatherproof seal
- Shrink and crack proof
- Can be exposed to water after only 30 minutes without washing out
- Cured sealant is mold and mildew resistant
- Low in odor
- Interior/exterior use
- Sold by the each



Item #	Color	Size
DP08771	Clear	10.8 oz



Fast 'N Final Lightweight Spackling

- A lightweight spackling that lets you patch and prime in one easy step
- Dries fast
- No need for sanding or priming
- Paint in minutes
- Interior and exterior use
- Ideal for small repairs, cracks and dents in drywall, plaster, wood and stucco
- Sold by the quart or gallon



Item #	Size
DP12142	1 Quart
DP12143	1 Gallon



Glaze Coat

- Ultra-clear, high gloss pour-on finishing epoxy
- Can be used on most surfaces- rough or smooth, stained or painted
- Great for coating tables or bar tops - one coat equals 70 coats of varnish
- Easy 1:1 mixing ratio
- Self-leveling - minimal spreading required
- Indoor use, resists temperatures up to 120 °F
- Sold by the each



Item #	Size
FWGLAZEcoat-PT-1	Pint
FWGLAZEcoat-QT-1	Quart
FWGLAZEcoat-GAL-1	Gallon

TOUCH-UP STICKS



Softwax Blendable Wax Filler System



- Quickly fill holes in finished woodwork
- Match nearly any surface by blending the 20 colors
- Kit includes: 20 wax sticks, wax wedge, buffing pad and carrying case
- Replacement sticks and accessories available
- Sold by the each

Item #	Description
FCWAXKT20F	20 stick kit
Kit Replacement Items	
FCWAXWEDGE	Replacement Wedges
FCWAXPAD	Replacement Buffing Pads



Wood Filler Custom Blend Kit



- Convenient carrying case holds 16 colors in 3.7 oz. jars
- Conversion chart makes matching popular stains with Color Putty easy
- Compact size (9-1/16"H x 7-7/8"W x 2-1/4"D) allows for easy storage
- Sold by the each

Includes:

100 White, 102 Natural, 106 Light Birch, 108 Light Oak, 110 Fruitwood, 114 Maple, 116 Butternut, 118 Cherry, 126 Br Mahogany, 124 Redwood, 130 Dark Walnut, 134 Ebony, 136 Nutmeg, 138 Pecan, 140 Briarwood, 144 Teakwood

Item #
CP9716



Wood Filler



- Compatible with oil-based sealers
- Not recommended for floors or tabletops
- Color Putty can be intermixed to create a blend that will match unique wood tones
- Cleans up with mineral spirits
- Sold by the each

Color/Species	3.7 oz Jar Item #	1 lb Jar Item #
White	CP100	CP100-1
Natural	CP102	CP102-1
Light Birch	CP106	CP106-1
Light Oak	CP108	CP108-1
Fruitwood	CP110	CP110-1
Maple	CP114	-
Butternut	CP116	CP116-1
Cherry	CP118	CP118-1
Honey Oak	CP122	CP122-1

Color/Species	3.7 oz Jar Item #	1 lb Jar Item #
Redwood	CP124	-
Brown Mahogany	CP126	CP126-1
Dark Walnut	CP130	CP130-1
Ebony	CP134	CP134-1
Nutmeg	CP136	CP136-1
Pecan	CP138	CP138-1
Briarwood	CP140	CP140-1
Teakwood	CP144	CP144-1

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y


A WOOD FILLERS, SOLVENT BASED

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y



Wood Filler

- Solvent based
- Professional-grade, heavy duty wood filler contains real wood fibers so it looks and acts like real wood
- Can be sanded, cut, drilled, screwed, planed, stained, varnished, painted or lacquered
- Dries fast and hard providing strong nail and screw anchoring without splitting
- Ideal for repairing furniture, doors, paneling, molding, plywood, and other wood surfaces
- Sold by the each



NOTE: Colors above are sample swatches only. Please perform a test run before using on final product.

Item #	Color/Species
DP21400	Light Oak
DP21404	Pine
DP21408	Golden Oak
DP21412	White
DP21434	Walnut
DP21502	Natural



Wood Filler

- Can be stained, sawed, drilled, sanded, planed and nailed like real wood
- Quick dry and ready to use with smooth spreading and even filling of any hole or crack
- Can be painted, varnished, lacquered, stained and oiled
- Sold by the each

Color/Species	1/4 Pint (6 oz.) Item #	1 Pint (24 oz.) Item #	1 Quart Item #
Alder	FW32AD	FW8AD	FW4AD
Ash	FW32AS	FW8AS	FW4AS
Birch	FW32BI	FW8BI	FW4BI
Cedar	FW32CD	FW8CD	-
Cherry/Red Oak	FW32RO/CR	FW8RO/CR	FW4RO
Mahogany	FW32MK	FW8MK	FW4MK
Maple	FW32MP	FW8MP	FW4MP
Natural/White Pine	FW32NAT/WP	FW8NAT/WP	FW4NAT/WP
Oak	FW32OK	FW8OK	FW4OK
Pine/Fir	FW32FR/PN	FW8FR/PN	FW4FR/PN
Walnut	FW32WL	FW8WL	FW4WL
White	-	FW8WH	-
White Glaze	FW32G	-	FW4G

FILL AND FINISH

Fill & Finish Water Based Putty, Ready To Use

Fill & Finish is a unique water-based multi-purpose wood and grain filler and can be used to mask small or large defects.



16 oz wide mouth container for easy putty knife access!



- Accepts any pigment - water or oil based
- Does not shrink, sink, crack, or fall out
- Can be sanded easily to achieve a desired finished look
- Can be drilled, nailed, planed or sawed like ordinary wood
- Can be restored to original consistency with water
- High solid content and fast dry time
- No VOC's
- Can be used inside or outside

Color	Name	16 oz. Item #	Quart Item #
	Ash	WR0890303500	WR0890303512
	Rosewood	WR0890303501	WR0890303513
	Cherry/Alder	WR0890303502	WR0890303514
	Mahogany/Braz Cherry	WR0890303503	WR0890303515
	Maple/Beech/Pine	WR0890303504	WR0890303516
	Natural/Tint Base	WR0890303505	WR0890303517
	Red Oak	WR0890303506	WR0890303518
	Ebony	WR0890303507	WR0890303519
	Walnut	WR0890303508	WR0890303520
	White	WR0890303509	WR0890303521
	White Oak	WR0890303510	WR0890303522
	Alder	WR0890303511	WR0890303523

Fill & Finish Powdered Grain Filler

- Same great features as Fill & Finish Wood Putty
- Simply mix with the right amount of lacquer or water for your project to achieve ideal viscosity
- Can be used for patching, grain-filling, inlay, and more

NOTE: Can be mixed with either water or oil based stains. Water based stains will dry harder.



Color	Name	6 oz. Item #	16 oz. Item #
	Ash	WR0890304500	WR0890304512
	Rosewood	WR0890304501	WR0890304513
	Cherry/Alder	WR0890304502	WR0890304514
	Mahogany/Braz Cherry	WR0890304503	WR0890304515
	Maple/Beech/Pine	WR0890304504	WR0890304516
	Natural/Tint Base	WR0890304505	WR0890304517
	Red Oak	WR0890304506	WR0890304518
	Ebony	WR0890304507	WR0890304519
	Walnut	WR0890304508	WR0890304520
	White	WR0890304509	WR0890304521
	White Oak	WR0890304510	WR0890304522
	Alder	WR0890304511	WR0890304523

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y

A WOOD FILLERS

B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y




Wood Filler, Water Based



- Water based wood filler has little or no impact on the environment
- Safe and easy to use, water clean-up
- Sold by the each

Species	1/4 Pint (6 oz.) Item #	1 Pint (24 oz.) Item #
Birch	FW32BIWB	FW8BIWB
Cherry/Dark Mahogany	FW32MKWB	FW8CHWB
Fir/Maple	FW32FMWB	FW8FMWB
Golden Oak	FW32GOWB	FW8GOWB
Natural	FW32NTWB	FW8NTWB
Oak	FW32OKWB	FW8OKWB
Red Oak	FW32ROWB	FW8ROWB
Walnut	FW32WLWB	FW8WLWB
White	FW32WHWB	FW8WHWB
White Pine	FW32WPWB	FW8WPWB

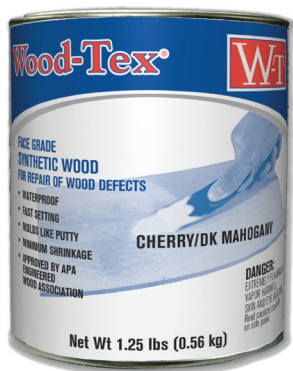

Wood-Tex® Wood Filler, Resin Based



- Smooth application properties
- Used to repair defects in plywood, furniture, laminated beams, cabinet work and other
- Molds like putty and is consistent, uniform, waterproof and fast-setting with minimal shrinkage woodworking applications
- Made with genuine wood flour and can be sanded, stained, sawed, planed or drilled like real wood
- Sold by the pint or quart

Color/Species	1 Pint Item #	Box Qty	1 Quart Item #	Box Qty
Cherry/Dark Mahogany	LOWPCH	12	-	-
Fir/Maple	LOWPFM	12	-	-
Natural/Ash	LOWPNT	12	LOWPQNT	4
Red Oak	LOWPRO	12	LOWPQRO	4
Walnut	LOWPWL	12	-	-
White Pine	LOWPWP	12	-	-

FILLERS



A



B



C

Body Fillers

- Sold by the each



	Item #	Type	Size
A	MH00265	Original	1 Gallon
B	MH05800	Lightweight	1 Quart
C	MH05801	Lightweight	1 Gallon



A



B

Hardeners

- Sold by the each



	Item #	Color	Size
A	MH05830	Red	2.75 oz
B	MH20058	White	2.75 oz



A



B

Glazing Putties

- Sold by the each



	Item #	Type	Color	Size
A	MH00650	Glazing and Spot Putty	Red	16 oz.
B	MH05095	Acrylic Glazing Putty	White	14.5 oz.

A LAMINATE REPAIRERS



SeamFil, 1 oz. Tube



- Use to cover up unsightly seams, joints, nicks and other imperfections in laminate
- Resists moisture, detergents, and other household products as effectively as the original laminate

NOTE: Custom mixes available Special Order

Item #	Color
SE901	White
SE902	Gray
SE903	Dark Gray
SE904	Tan
SE913	Brown
SE914	Black
SE918	Mahogany
SE919	Pink
SE931	Maple
SE933	Teak
SE934	Gray Walnut

Item #	Color
SE935	Birch
SE936	Primary Yellow
SE937	Primary Red
SE939	Olive
SE940	Orange
SE941	Almond
SE942	Butcher-block
SE945	Spectrum Green
SE946	Spectrum Blue
SE01573	Wilsonart Frosty White
SE00756	Formica Natural Maple

Item #	Color
SE00909	Formica Black
SE00912	Formica Storm
SE00927	Formica Folkstone
SE00932	Formica Antique White
SE00949	Formica White
SE00961	Formica Fog
SE07014	Formica Colorado Slate
SE07022	Formica Natural Canvas
SE07266	Formica Cotta Stone
SE07732	Formica Butterum Granite

SeamFil Accessories

Item #	Description	Item #	Description
SE943	SeamFil Clear Gloss, 1 oz tube	SESF99-12	SeamFil Solvent, 1/2 Pint
SE944	SeamFil Dry Time Retarder, 1 oz tube	SESF99	SeamFil Solvent, 1 Quart



Putty Knife



- Specially ground and hand-polished putty knife is made under the highest specifications of any putty knife
- Will not scratch the laminate surface
- Blade is 3-1/2" long x 1-1/4" wide; handle is 4" long

Item #
SEPK



SeamFil Kits, Woodgrain & Standard



- Woodgrain Kit contains one each of the 12 most popular woodgrain colors in 1 oz. tubes:
- Standard Kit contains one each of the 12 most popular solid colors in 1 oz. tubes
- Each kit type includes non-scratch putty knife and 1/2 pint of SESF99-12 Seamfil solvent

Item #	Description
SEWK	Woodgrain Kit
SESK	Standard Kit