



CM626

26" HEAVY DUTY SPIRAL INSERT HEAD PLANER



PMB #104 1124 Fir Avenue
Blaine, WA 98230



T: 1.888.982.2683
F: 604.540.1780



Youtube // @CantekMachinery
Twitter // @CantekMachinery



www.cantekamerica.com
sales@cantekamerica.com




CM626

26" HEAVY DUTY SPIRAL INSERT HEAD PLANER



SPIRAL INSERT CUTTERHEAD

Spiral insert knife cutterhead with (6) rows of 30 x 12 x 1.5mm knives. Knives are two sided & have bevels on each corner producing a smooth finish. Wider knife means less knives/head resulting in reduced changeover time.

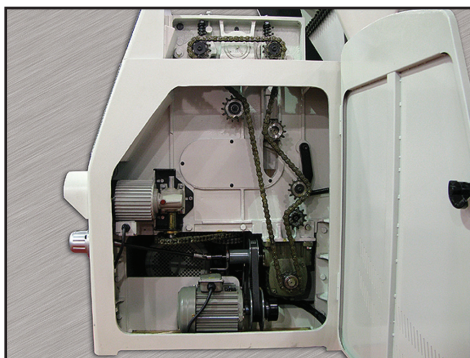

POWERFUL CHAIN DRIVE ASSEMBLY

Heavy duty chain drive system to top feedworks and driven bed rolls produce a powerful and smooth feeding system




PRECISE BED ROLL ADJUSTMENT

Convenient bed roll adjustment on the front of the feed table allows for precise setting of the powered bed rolls for the best possible feeding results



DIGITAL THICKNESS CONTROL

Equipped with a digital thickness control which can be programmed in Inch of Metric. To 3-decimal places in inches and 2-decimal places in Millimeters.

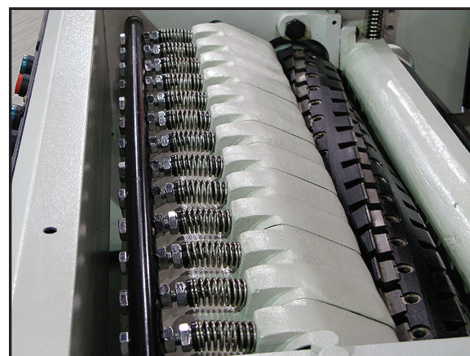

HEAVY DUTY PRESSURE SECTION

Sectional chipbreakers and section infeed pressure roller for positive feeding of material. Rubber covered outfeed roller. Anti-kickback fingers are installed for added safety



VARIABLE FEED SPEED

Variable feed speed control located conveniently on the operator side of the machine

FEATURES

- Spiral cutterhead with 6 rows insert knives provides high removal, superior finish and low noise
- Solid cast iron construction
- Variable feed speed
- Drive top and bottom feed rolls
- Front & rear bed rollers easily adjusted from the front of the machine
- Power table elevation by digital thickness control
- Section infeed roll and section chipbreaker
- Anti-kickback fingers for added safety
- Dual heavy jack screws with slides for accuracy & rigidity
- Dust exhaust outlet (6")
- Sound dampening machine cover
- All operations on convenient control panel

SPECIFICATIONS

Maximum planing width	26"
Maximum planing thickness	11 3/4"
Maximum depth of cut	3/8 "
Minimum part length	10.5"
Table area	35" x 27"
Feed speeds variable	16 – 70 FPM
Main motor	20 HP
Feed motor	1 HP
Table motor	1/2 HP
Knives	30 x 12 x 1.5 qty 100
Cutterhead	4 3/4" dia. x 5000 rpm
Top feed rollers	3" dia.
Dust hood outlet	6" dia.
Electrics	230 or 460 or 575/3/60
Net weight	2200 lbs.