



HS21T


CONSTRUCTION & LINE BORING MACHINE






HS21T

CONSTRUCTION & LINE BORING MACHINE

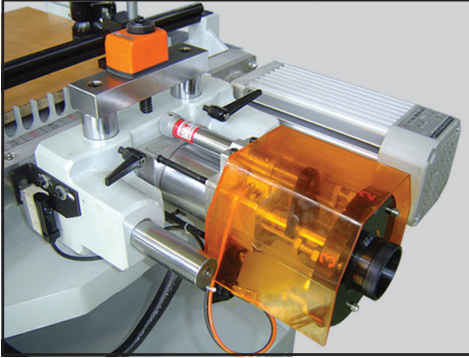

BORING DEPTH ADJUSTMENT

The boring depth can be quickly and accurately adjusted by a six position turret stop. The boring height is adjusted by precision digital readout.

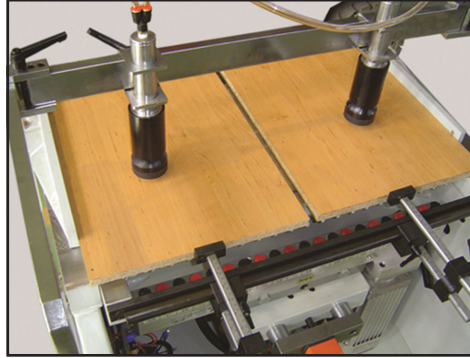


ADJUSTABLE BORING DEPTH FROM PANEL EDGE

Comes equipped with back stops with dual measurement scales for accurate adjustment of the boring depth.




BACK FENCE WITH FLIP STOPS

Comes equipped with a 9-foot (3 meter) back fence and 4 flip stops for fast setup in line drilling applications.

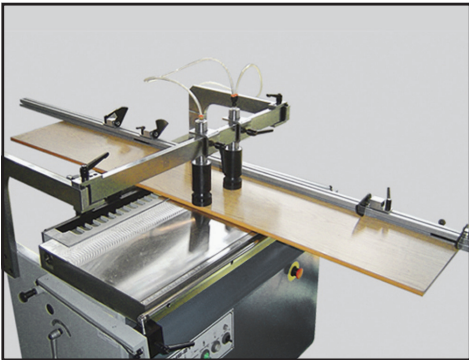


LONGITUDINAL DOWEL DRILLING

The linear fence and stops can be positioning longitudinally for drilling of fixed shelf holes for dowel construction.

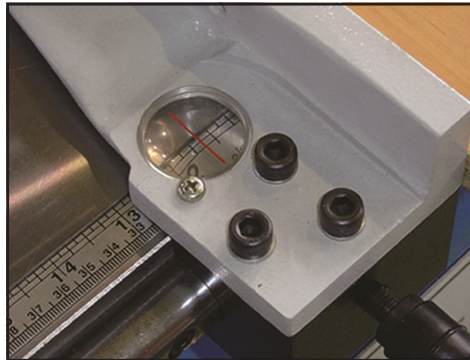

ADJUSTABLE SIDE FENCES

Equipped with right and left side fences for end boring comes equipped with dual measurement scales and magnifying glass. Easily fold away for convenient storage.

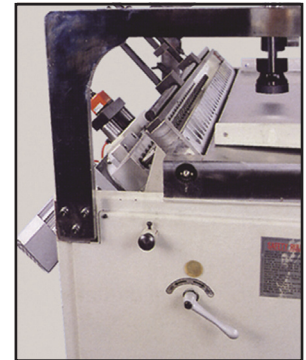

TILTING BORING UNIT

Pneumatic tilting of the boring unit from horizontal to vertical position. Boring head can also be locked manually for angle drilling.

FEATURES

- Single line boring machine with 21 spindles at 32mm centers
- Tiltable boring unit can be changed from horizontal to vertical drilling by pneumatic setting
- Boring unit can be tilted manually for angular drilling
- Pneumatic drilling cycle by convenient foot pedal
- Adjustable drill feed speed
- Two fences provides convenient positioning of the workpiece
- Mechanical digital readouts are provided for precise setting of the boring head
- Quick 6-position boring depth selector for fast changeover
- Two fold away side fences for end boring or drilling smaller components
- 3 meter (9.8') back fence with 4 adjustable stops for line boring or can be set on the side fence for dowel drilling on face of the gable
- 21 quick change chuck for fast changeover

SPECIFICATIONS

Distance between center	32mm
Number of spindles	21
Max. drilling depth	3" (75mm)
Boring head adjustment	0°~90°
Table size	34.33" x 19.3" (872 x 490mm)
Spindle speed	2800 RPM
Motor	2.5HP
Machine weight	770 lbs (350kgs)
Shipping weight	946 lbs (430kgs)
Machine dimensions	38.11"x32 1/4" x 48" (968x820x1220mm)
Shipping dimensions	45"x35"x54" (1143x889x1372mm)