



PART #

310.318.2491 • 800.523.1269 • www.mockett.com


SH15



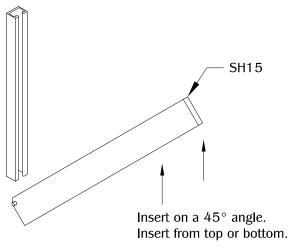





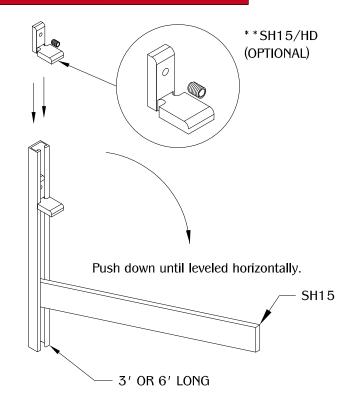

1. Install Track A (SHTRC) or B (SHTRM) on the wall. Make sure that the track is aligned vertically.

Track A can be flush mounted by cutting the 1/2" drywall to 11/16" x 3' x 6' long, SH15 must be in place.

(NOTE: Make sure to mount on studs for better support.)

- 2. Slide SH15 bracket at a 45° angle and when the desired height is reached, push down until bracket is at horizontal level. (NOTE: Brackets must be installed a minimum of 6" from the top or the bottom of the track.)
- 3. **SH15/HD is an optional bracket to add more stability.
 - 3.1 Slide SH15/HD on top of shelf material.
 - 3.2 Secure placement by tightening set screw.


		SHTRC		SHTRM	
	USABLE	LOAD	WITH	LOAD	WITH
PART (LENGTH)	LENGTH	CAPACITY	SH15/HD	CAPACITY	SH15/HD
SH15A (7-11/16")	7-1/4"				
SH15B (9-11/16")	9-1/4"				
SH15C (11-11/16")	11-1/4"	70 lbs.	110 lbs.	110 lbs.	130 lbs.
SH15D (15-11/16")	15-1/4"	PER	PER	PER	PER
SH15E (23")	22-1/2"	PAIR	PAIR	PAIR	PAIR
DEPTH ON SH15					
2", NOT 1-1/4"					

WEIGHT CAPACITY IS VALID FOR EVENLY DISTRIBUTED STATIC LOAD, INSTALLED INTO STUDS OR CONCRETE ONLY.

PART #

SHTRC

310.318.2491 • 800.523.1269 • www.mockett.com

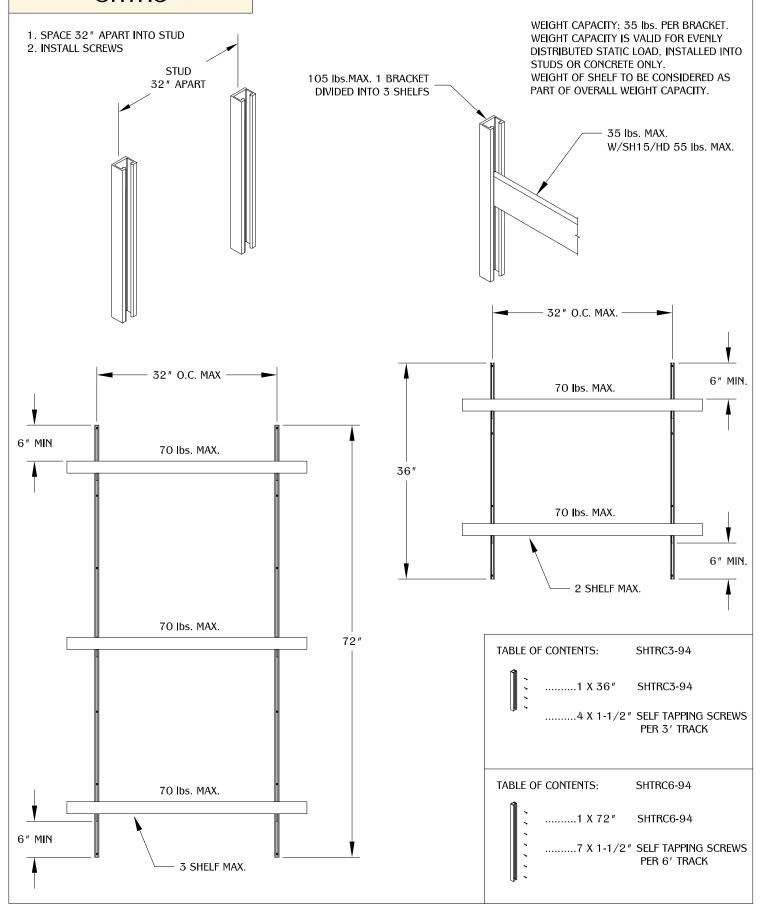

PART #

SHTRM

310.318.2491 • 800.523.1269 • www.mockett.com

