

Cabinet hardware technology is our competence and passion. Our products set the benchmark for function, quality, and comfort. The brand Hettich symbolizes a strong partnership with the Kitchen and Bath, Residential, Office, Distribution, and Appliance industries. Our today is dedicated to designing a successful tomorrow. Through our brand values (Quality, Innovation, Reliability, and Closeness to customers) we will pave the way to future successes.


Hettich is a German based, family owned, global supplier of hinges, drawer slides, drawer systems, and sliding / folding hardware. We have production facilities located in North America, Europe and Asia.

For all demands:

Quadro drawer slides







Quadro is available as full extension, in many lengths and load capacities.



Even heavy drawers close quietly and gently – thanks to the integrated Silent System.



Quadro drawer slides guarantee the ultimate in drawer convenience: attractive design through concealed installation, long service life and unceasing top performance.

Precision ball bearing construction, for perfect and lateral stability.

The optional Silent System gently shuts drawers in complete silence.



High precision Quadro profiles provide easy action and smooth gliding performance, for a maximum feel of luxury.




Installing wooden drawers couldn't be easier: simply slide on the drawer.

3

Benefits at a glance:

Quadro drawer slides

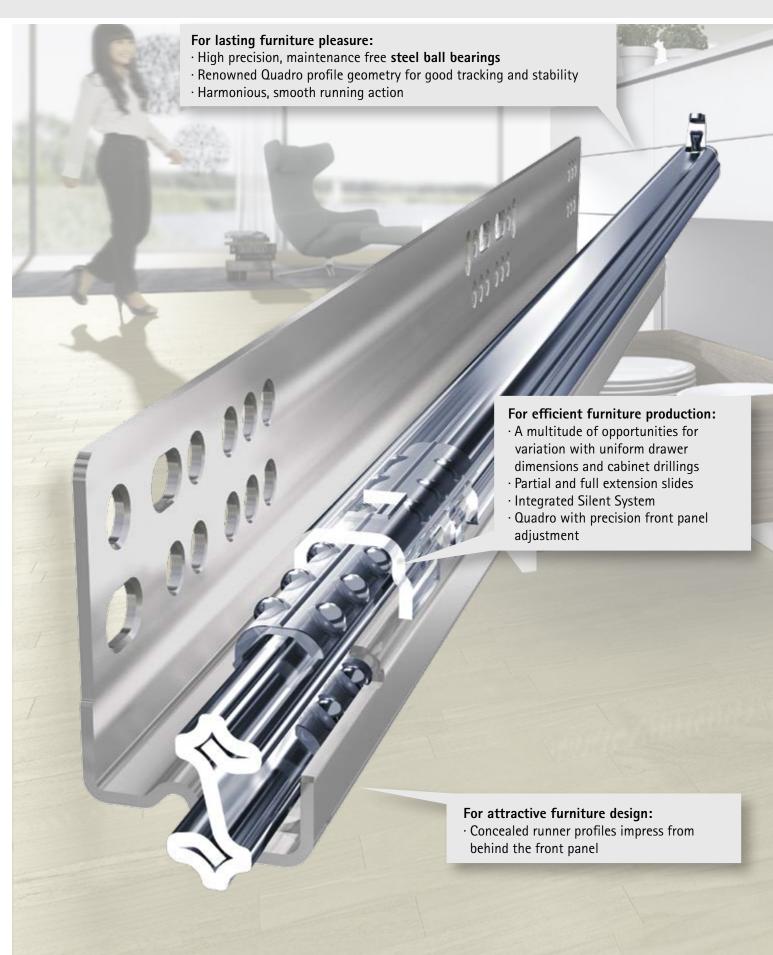



Benefits at a glance:

Quadro drawer slides



Quadro full extension slides



Quadro drawer runners guarantee the ultimate in drawer convenience. With attractive design from concealed installation. With long life and constant top performance. Precision ball bearing construction, for perfect vertical and lateral stability.

The optional Silent System gently shuts drawers in complete silence. The Push to open function automatically opens the pull-out in response to a light press on the front panel – for handleless fronts.



Quadro:Precision engineered for strength and excellent running quality.



For all demands: Full extension runners in many lengths and loading categories.



For the most exacting of demands: Even heavy drawers close quietly and gently – thanks to the integrated Silent System.



Push to open: The perfect solution for opening handleless drawers.



Perfectly aligned front panels: Quadro 5D with 5 way adjustment capability.



Wooden drawers very easy to install: slide on and plug on principle.

- **▶** Quadro full extension slides
- Summary



Quadro 2D V6 IW 21 / Quadro 5D V6 IW 21 / Quadro V6+ IW 21 full extension slides, slide on installation Range summary / Technical comparison

10



Accessories
Range summary / Technical comparison


10



Technical information

22 - 26







	Quadro 2D/5D V6	Quadro V6+	Accessories
Page	12 - 16	17	18 - 21
Description	Full extension runner with integrated Silent System or opening system and 1D / 2D adjustment	Full extension runner with integrated Silent System	Rear attachments, spacer block, optional opening system
Loading capacity	90 lbs	130 lbs	
Drawer lengths	9" - 24"	15" - 24"	
Installation	 Face frame application or frameless application Slide on installation 	 ▶ Only for frameless application ▶ Slide on installation 	

- ▶ Quadro 2D V6 full extension slide with Silent System and Push to open
- ▶ Load capacity 90 lbs

Quadro 2D V6 IW 21 full extension slide



- ▶ Slide on installation with catches and tool-less drawer adjustment
- ▶ Side adjustment up to +/- 2 mm with 2D front fixing clips
- Various user friendly functions (see ordering table)
- ▶ Optionally upgradeable with **Push to open Silent**: convenient opening mechanism in combination with silent and soft closing; upgradeable with synchronization
- ▶ Meets or exceeds ANSI / BHMA 156.9 grade 1 requirements
- ► Load capacity up to 90 lbs dynamic (100 lbs static), as per ANSI / BHMA 156.9 grade 1 specifications on a 21" length slide
- Galvanized steel, suitable for rooms exposed to moisture
- For 1 / 2" (13 mm) or 5 / 8" (16 mm) drawer side thickness
- ► For narrow applications

Pack of two				
Item	Silent System	Silent System with locating tab	Push to open	
	1 pair	1 pair	1 pair	
Quadro 2D V6 9"	9 304 257	9 304 294	-	
Quadro 2D V6 12"	9 304 260	9 304 297	9 304 314	
Quadro 2D V6 15"	9 304 266	9 304 300	9 304 318	
Quadro 2D V6 18"	9 304 274	9 304 303	9 304 321	
Quadro 2D V6 21"	9 304 282	9 304 306	9 304 324	
Quadro 2D V6 24"	9 304 286	-	9 304 310	

Bulk pack						
Item	•		Silent System with locating tab pack of 10 (*20)		Push to open pack of 10	
	left	right	left	right	left	right
Quadro 2D V6 9"	9 304 255*	9 304 256*	9 304 292*	9 304 293*	-	-
Quadro 2D V6 12"	9 304 258	9 304 259	9 304 295	9 304 296	9 304 312	9 304 313
Quadro 2D V6 15"	9 304 261	9 304 262	9 304 298	9 304 299	9 304 315	9 304 316
Quadro 2D V6 18"	9 304 271	9 304 272	9 304 301	9 304 302	9 304 319	9 304 320
Quadro 2D V6 21"	9 304 280	9 304 281	9 304 304	9 304 305	9 304 322	9 304 323
Quadro 2D V6 24"	9 304 283	9 304 284	-	-	9 304 308	9 304 309

IW = Installation width

Advice

▶ See page 18 for Push to open Silent info

- ▶ Quadro 5D V6 full extension slide with Silent System
- ▶ Load capacity 90 lbs

Quadro 5D V6 IW 21 full extension slide



- ▶ Slide on installation with catches and tool-less drawer adjustment
- ▶ Side adjustment up to +/- 2 mm with 2D front fixing clips
- Various user friendly functions (see ordering table)
- Optionally upgradeable with Push to open Silent: convenient opening mechanism in combination with silent and soft closing; upgradeable with synchronization
- ▶ Meets or exceeds ANSI / BHMA 156.9 grade 1 requirements
- ► Load capacity up to 90 lbs dynamic (100 lbs static), as per ANSI / BHMA 156.9 grade 1 specifications on a 21" length slide
- ▶ Galvanized steel, suitable for rooms exposed to moisture
- For 1 / 2" (13 mm) or 5 / 8" (16 mm) drawer side thickness

13

► For narrow applications

Pack of two	
Item	Silent System
	1 pair
Quadro 5D V6 9"	9 375 480
Quadro 5D V6 12"	9 375 481
Quadro 5D V6 15"	9 375 482
Quadro 5D V6 18"	9 375 483
Quadro 5D V6 21"	9 375 484
Quadro 5D V6 24"	9 375 485

Bulk pack		
Item	Silent System pack of 10 (*20)	
	left	right
Quadro 5D V6 9"	9 374 861*	9 374 862*
Quadro 5D V6 12"	9 374 863	9 374 866
Quadro 5D V6 15"	9 374 867	9 374 898
Quadro 5D V6 18"	9 374 899	9 374 900
Quadro 5D V6 21"	9 374 901	9 374 902
Quadro 5D V6 24"	9 374 903	9 374 904

IW = Installation width

Advice

▶ See page 18 for Push to open Silent info

www.hettich.com Hettich

- ▶ Quadro 2D/5D V6 full extension slide with Silent System and Push to open
- ▶ Load capacity 90 lbs

Front fixing clip sets 1D Top mount 5/8"



- ▶ Set contains one front fixing clip left / right each
- For 16 mm (5/8") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 95 mm (3 23/32")
- ▶ Installation recommended with two # 6 x 5/8" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 5/8"	9 306 538	100
	9 308 662	20

Front fixing clip sets 1D Top mount 1/2'



- Set contains one front fixing clip left / right each
- For 13 mm (1/2") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 95 mm (3 23/32")
- ▶ Installation recommended with two # 6 x 3/4" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 1/2"	9 306 537	100
	9 308 661	20

Front fixing clip sets 1D Front mount 5/8"



- Set contains one front fixing clip left / right each
- ▶ For 16 mm (5/8") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 95 mm (3 23/32")
- ▶ Installation recommended with two # 6 x 5/8" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 5/8"	9 306 534	100
	9 308 638	20

Front fixing clip sets 1D Front mount 1/2



- ▶ Set contains one front fixing clip left / right each
- For 13 mm (1/2") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- Minimum drawer inside width = 95 mm (3 23/32")
- ▶ Installation recommended with two # 6 x 3/4" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 1/2"	9 306 533	100
	9 308 637	20

Advice

- ▶ Quadro 2D/5D V6 full extension slide with Silent System and Push to open
- Load capacity 90 lbs

Front fixing clip sets 2D/5D Top mount 5/8"



- ▶ Set contains one front fixing clip left / right each
- ▶ Side adjustment up to +/- 2 mm
- ▶ For 16 mm (5/8") drawer material thickness
- With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 130 mm (5 1/8")
- ▶ Installation recommended with two # 6 x 5/8" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 5/8"	9 306 540	100
	9 308 664	10

Front fixing clip sets 2D/5D Top mount 1/2"



- ▶ Set contains one front fixing clip left / right each
- ▶ Side adjustment up to +/- 2 mm
- ▶ For 13 mm (1/2") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 130 mm (5 1/8")
- ▶ Installation recommended with two # 6 x 3/4" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 1/2"	9 306 539	100
	9 308 663	10

Front fixing clip sets 2D/5D Front mount 5/8"



- ▶ Set contains one front fixing clip left / right each
- ▶ Side adjustment up to +/- 2 mm
- For 16 mm (5/8") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 130 mm (5 1/8")
- ▶ Installation recommended with two # 6 x 5/8" flat head screws per clip

Item	Order no.	PU
Front fixing clip set for 5/8"	9 306 536	100
	9 308 640	10

Front fixing clip sets 2D/5D Front mount 1/2"



- ▶ Set contains one front fixing clip left / right each
- ➤ Side adjustment up to +/- 2 mm
- For 13 mm (1/2") drawer material thickness
- ▶ With + 3 mm toolless height adjustment
- ▶ Minimum drawer inside width = 130 mm (5 1/8")
- ▶ Installation recommended with two # 6 x 3/4" flat head screws per clip

Item	Order no.	PU
Event fiving alin set for 1/2"	9 306 535	100
Front fixing clip set for 1/2"	9 308 639	10

15

Advice

- ▶ Quadro 2D/5D V6 full extension slide with Silent System and Push to open
- ▶ Load capacity 90 lbs

Distributor pack: Quadro 2D/5D V6 Front fixing clip set with spacers




- For securely connecting the Quadro runner and wooden drawer without the need for tools
- ▶ Tool-less height adjustment up to + 2 mm
- ▶ Installation recommended with two # 6 x 7/8" flat head screws per catch and side adjustment up to +/- 1.5 mm
- ▶ Plastic, grey

Distributor pack includes:

- ▶ 10 LH Front Fixing Clips
- 10 RH Front Fixing Clips
- ≥ 20 Spacers for 1/2" drawer box material

Article	Order no.	PU
Distributor pack	9 324 200	10

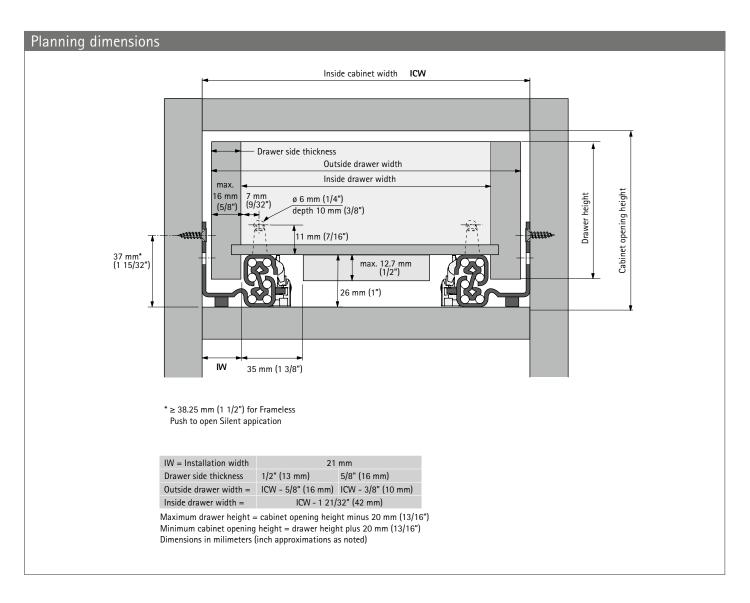

Advice

- ▶ Quadro V6+ full extension slide with Silent System
- ▶ Load capacity 130 lbs

Quadro V6+ full extension slide with Silent System



- Silent System: the integrated Silent System closes the drawer quietly and gently
- Convenient slide on installation with catches and tool-less height adjustment
- ▶ Meets or exceeds ANSI/BHMA 156.9 grade 1 requirements
- Load capacity up to 130 lbs dynamic (170 lbs static), as per ANSI/BHMA 156.9 grade 1 specifications on a 21" length slide
- ▶ Galvanized steel, suitable for rooms exposed to moisture
- ▶ For 5/8" (16 mm) drawer side thickness
- ▶ For frameless application only

Quadro V6+ IW21 full extension drawer slide								
Item	Drawer box length	Order no.	Order no.	PU				
	mm (inch)	Left hand	Right hand					
Quadro V6 15"	381 mm (15")	9 248 619	9 248 620	8				
Quadro V6 18"	457 mm (18")	9 244 389	9 244 390	8				
Quadro V6 21"	533 mm (21")	9 244 387	9 244 388	8				
Quadro V6 24"	610 mm (24")	9 236 068	9 236 069	8				

IW = Installation width


Front fixing clip



- ▶ Set contains one front fixing clip left/right each
- ▶ For safely connecting the Quadro runner and wooden drawer without the need for tools
- ▶ Infinite height adjustment up to + 2 mm via a knurled wheel
- ▶ Plastic, back

Item	Order no.	PU
Front fixing clip left hand	9 117 483	100
Front fixing clip right hand	9 117 485	100
Front fixing clip set	9 117 492	5

17

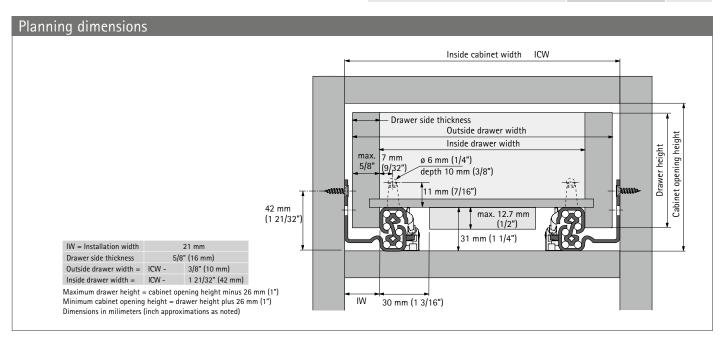

Advice

Drawer runners for wooden drawers

- Quadro accessories
- Push to open Silent for Quadro 2D V6 / 4D V6 with Silent System

Push to open Silent for Quadro 2D V6 with Silent System



- Units: 20 kg (45 lbs), 40 kg (90 lbs)
- Optional, upgradeable for all nominal lengths without tools
- ▶ Internal cabinet body width > 200 mm (7 7/8"), minimal drawer front gap of 2.5 mm (3/32")
- Can be clipped on without tools
- Drawers can still be pulled open / guided closed

Set comprises:

- ▶ 1 Push to open Silent unit, left and right
- ▶ 1 activator, left and right
- ▶ 2 adapters for mounting optional synchronization

Total weight Quadro			Nominal length	Order no.	PU		
kg	lbs	kg	lbs	mm	inch		
8 - 20	15 - 45	30	66	250 - 600	12" - 24"	9 308 679	1
10 - 40	25 - 90	40	90	380 - 600	15" - 24"	9 308 678	1

Optional synchronization for Push to open Silent



- ▶ Synchronization bar for cutting to length, 2000 mm (78 24/32")
- Connector for minimising offcut waste
- Recommended for cabinet bodies in widths of > 600 mm (24"); can be used from 275 mm (11")
- Aluminium, anodized, grey plastic

Article	Order no.	PU
■ Synchronization bar	9 236 718	100
2 Connector	9 221 295	20

Advice

Drawer runners for wooden drawers

- **▶** Quadro accessories
- ▶ Push to open Silent for Quadro 2D V6 / 5D V6 with Silent System

Recommendation for drawer (front panel height up to approx. 150 mm / 6")*														
Nominal length Nominal width in inch (")														
mm	inch	12"	15"	18"	21"	24"	27"	30"	33"	36"	39"	42"	45"	48"
250 - 300	12"													
380 - 550	15" - 21"													
580 - 600	24"													

Recomme	endation fo	r pot-ar	nd-pan d	drawer (front pa	nel heig	ht up to	approx	. 300 m	m / 12",	light to	mediur	n duty l	oading)*
Nominal le	ngth	Nomina	l width in	inch (")										
mm	inch	12"	15"	18"	21"	24"	27"	30"	33"	36"	39"	42"	45"	48"
250 - 300	12"													
380 - 550	15" - 21"													
580 - 600	24"													

Kecommer	ndation for po	ot-and-pa	n drawer,	heavy du	ty (front p	anel heigh	nt up to a	pprox. 300) mm / 12	2", heavy o	duty loadii	ng, e.g. wi	th stacks (of plates
Nominal length Nominal width in inch (")														
mm	inch	12"	15"	18"	21"	24"	27"	30"	33"	36"	39"	42"	45"	48"
250 - 300	12"													i
380 - 550	15" - 21"													
580 - 600	24"													

Order no. Push to open Silent:	9 246 315	9 246 316
	9 308 679	9 308 678

^{*} Recommendations for applications (front panel 19 mm chipboard, normal household loading), please refer to our online configurator to get more exact recommendations for customer chosen front panel dimensions and materials.

Advice


▶ Dimensions in millimeters (inch approximations as noted). Subject to technical modifications without notice.

www.hettich.com Hettich

19

- Quadro accessories
- Rear attachments

Metal rear attachment set (screw-on) for Quadro 2D/5D V6

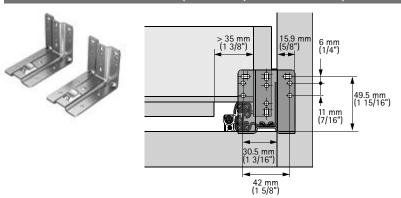


- ▶ Set contains 2 metal rear mount brackets
- ► For up to 37 mm (1 7/16") depth adjustment and +/- 2 mm (3/32") side adjustment
- ▶ Additional adjustment via oblong holes
- ▶ Installation recommended with min. two # 6 pan head screws or similar
- May also be bottom mounted

Item	Order no.	PU
Rear attachment set	9 308 864	10

Plastic rear attachment set (TennTex Solutions C-307, plug in) for Quadro 2D V6






- ▶ Plastic rear mount bracket with connector
- ▶ Non-handed, two-piece design (pre-assembled)
- For up to 26 mm (1") depth adjustment and +/- 16 mm (5/8") side-to-side self-alignment
- ▶ Non-detachable 8 mm dowels
- ► For 1/8" rear panel material thickness

Item	Order no.	PU
Rear attachment left hand	9 308 856	100
Rear attachment right hand	9 308 857	100

Plastic rear attachment set (TennTex Solutions C-274, screw-on) for Quadro 2D V6






- ▶ Plastic rear mount bracket with connector
- ▶ Non-handed, two-piece design (pre-assembled)
- ► For up to 26 mm (1") depth adjustment and +/- 12 mm (15/32") side-to-side self-alignment
- ▶ Installation recommended with four # 8 flat head screws per bracket

Item	Order no.	PU
Rear attachment left hand	9 308 854	100
Rear attachment right hand	9 308 855	100

Advice

- Quadro accessories
- Rear attachments

Metal rear attachment set (screw-on) for Quadro 4D V6

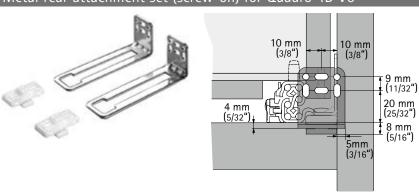


- ▶ Set contains 2 metal rear mount brackets and 2 plastic connectors
- Non-handed, two-piece design
- For up to 50 mm (1 15/16") depth adjustment and ± 1,5 mm (1/16") side adjustment
- ▶ Additional adjustment via oblong holes
- Installation recommended with min. four # 6 pan head screws or similar

Item	Order no.	PU
Rear attachment set	9 055 093	10

Plastic rear attachment (TennTex Solutions C-307, plug-in) for Quadro 4D V6






- Plastic rear mount bracket with connector
- Non-handed, two-piece design (pre-assembled)
- For up to 27 mm (1 1/16") depth adjustment and +/− 16 mm (5/8") side-to-side self-alignment
- ▶ Non-detachable 8 mm dowels
- For 1/8" rear panel material thickness.
- ▶ Order 2 per drawer

Item	Order no.	PU
Rear attachment	1 135 174	100

Plastic rear attachment (TennTex Solutions C-274, screw-on) for Quadro 4D V6






- ▶ Plastic rear mount bracket with connector
- ▶ Non-handed, two-piece design (pre-assembled)
- ► For up to 27 mm (1 1/16") depth adjustment and +/- 12 mm (15/32) side-to-side self-alignment
- Installation recommended with four # 8 flat head screws per bracket
- Order 2 per drawer

Item	Order no.	PU
Rear attachment	1 135 181	100

Spacer block





- ▶ 25 mm (1") distance block
- For Setback blocking, frameless construction, internal pullouts, etc.
- ▶ Installation recommended with one Ø 6.3 mm Euro screw or # 8 flat head screw per spacer
- ► Installation of slide to spacer recommended with one Ø 6.3 mm Euro screw per spacer

Item	Order no.	PU
Spacer, 25 mm white	1 130 537	200

21


Advice

Dimensions in millimeters (inch approximations as noted). Subject to technical modifications without notice.

www.hettich.com

▶ Quadro


Technical information

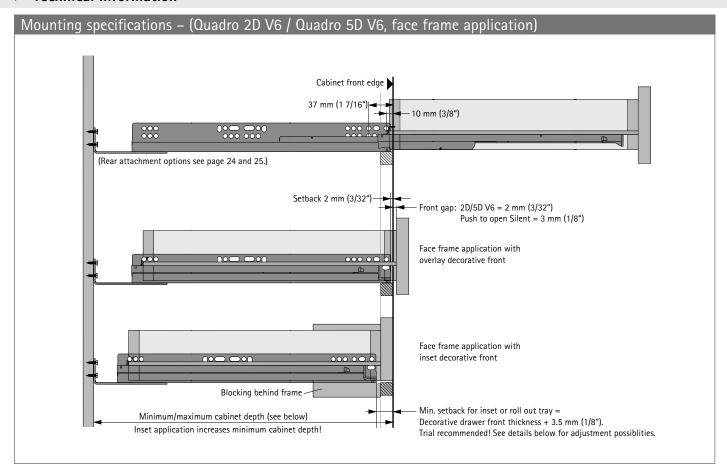


Minimum / maximum cabinet depth (Quadro 2D V6, face frame application)					
Drawer bo	ox length (inch)	Min-Max cabinet de metal rear attachme mm	•	Min-Max cabinet dep plastic rear attachme mm	
229 mm	(9")	257 - 294 mm	(10 1/8" - 11 9/16")	279 - 305 mm	(11" - 12")
305 mm	(12")	333 - 370 mm	(13 1/8" - 14 9/16")	355 - 381 mm	(14" - 15")
381 mm	(15")	409 - 446 mm	(16 3/32" - 17 9/16")	431 - 457 mm	(17" - 18")
457 mm	(18")	485 - 522 mm	(19 3/32" - 20 9/16")	505 - 531 mm	(20" - 21")
533 mm	(21")	561 - 598 mm	(22 3/32" - 23 17/32")	584 - 610 mm	(23" - 24")
610 mm	(24")	no rear attachment, r	nust be blocked out	no rear attachment, m	ust be blocked out

Advice

- Quadro
- Technical information

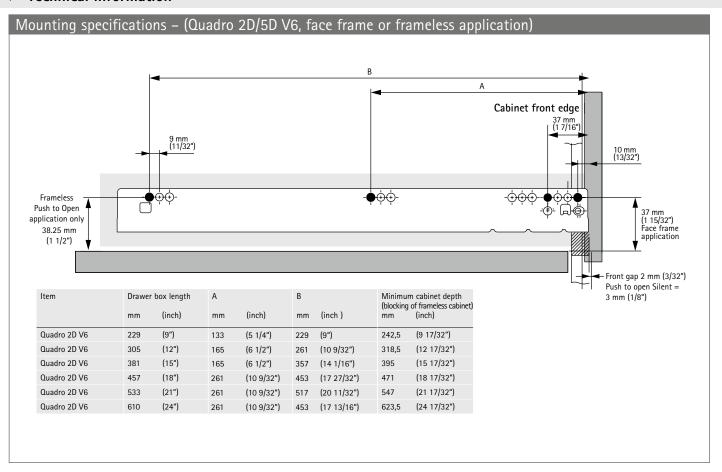

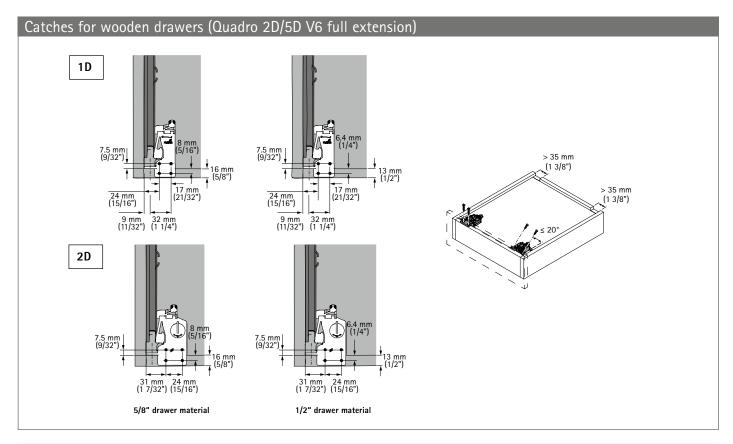



Advice

▶ Dimensions in millimeters (inch approximations as noted). Subject to technical modifications without notice.

23

- **▶** Quadro
- **▶** Technical information

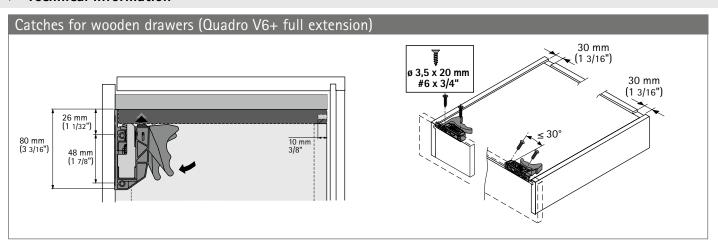

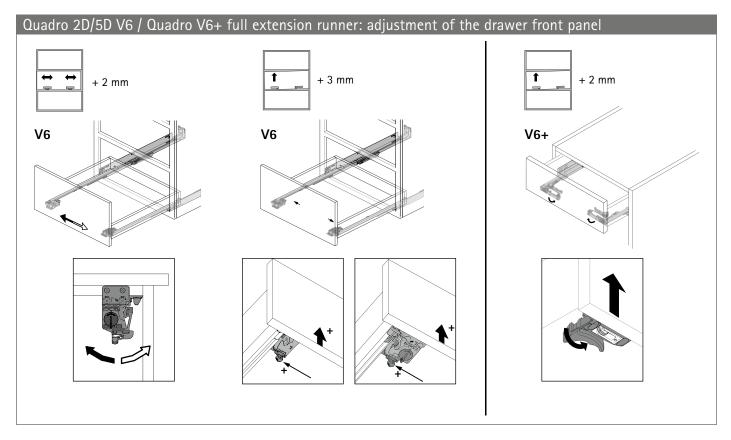


Advice


▶ Dimensions in millimeters (inch approximations as noted). Subject to technical modifications without notice.


Hettich

- Quadro
- **▶** Technical information

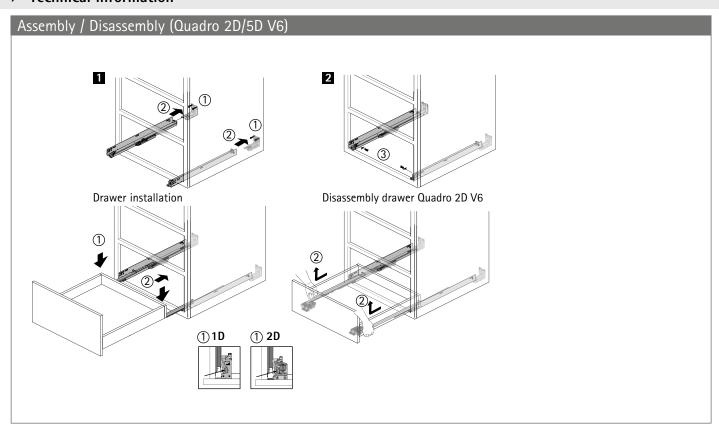

- **▶** Quadro
- Technical information

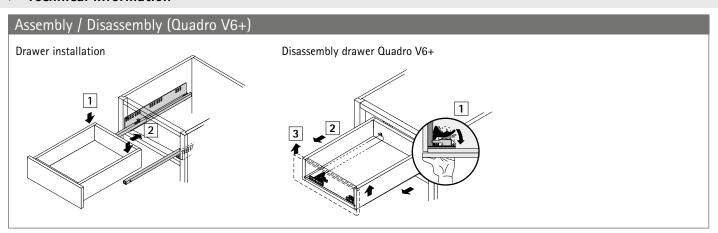

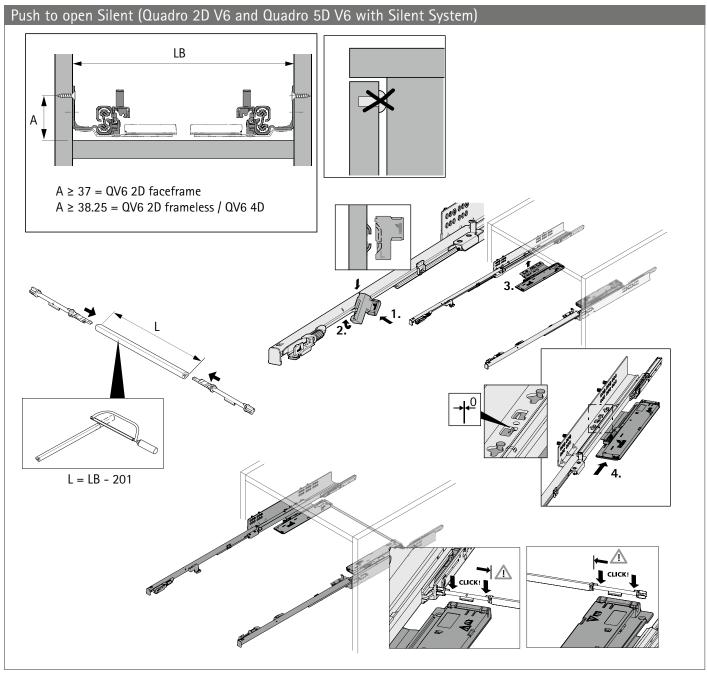

Advice

▶ Technical Information

▶ Legal Notice

Application

Hettich slides are suitable for use in living room and kitchen cabinets both in the home and business environment (face frame and frameless construction).

Load capacity and over-extension guard

The load capacity ANSI/BHMA 156.9, grade 1 stated in the catalogue is understood to mean the weight of the drawer itself including contents.

All Hettich slides feature guards to prevent the drawer from rolling out and being removed unintentionally and meet the requirements of the impact test in a test frame to ANSI/BHMA 156.9, grade 1.

Fitted in the proper manner, the slides featured in this catalogue are suitable for cabinet demands as described by K.C.M.A.

Corrosion test

Hettich slide systems satisfy the requirements on corrosion defined in DIN EN 15338, 72-hour condensation-water test to DIN EN 6270.

Material specification

Zinc-plated steel slide with permanently lubricated synthetic ball bearing races, hardened steel balls; spring loaded self-closing mechanism/non-fluid damping mechanism; zinc-plated steel or synthetic rear bracket; synthetic front fixing clip.

General technical conditions

The fitting instructions, screw-fixing points and loading information specified in this catalogue assume proper attachment in a cabinet material providing a screw pull-out resistance of > 1,000 N in accordance with DIN EN 320. Hettich accepts no responsibility for the use of materials or fastening methods other than those stated. If other materials or methods of attachement are used, the cabinet manufacturer is required to verify the system's load-bearing capacity.

General terms of sale and delivery:

All products and services will be provided exclusively on the basis of our General Terms of Sale and Delivery published on our website at www.hettich-agb.com.

Legal Notice

© Hettich Marketing- und Vertriebs GmbH & Co. KG 32278 Kirchlengen · Germany January 2025

We reserve all rights to this catalogue under copyright law. It shall not be permissible to duplicate this catalogue in any form either in whole or in part without our written consent. Subject to technical alterations.

Errors and omissions excepted.

Subject to colour variations.



www.hettich.com Hettich 27

www.hettich.com

Hettich America, L.P. 4295 Hamilton Mill Road Suite 400 Buford, GA 30518 Phone: 1-800-438-8424

Fax: 1-800-627-5152 info@hettichamerica.net

