



IMPORTANT:

It is highly recommended that you install the **cam/prong driver** and **lock cylinder** into the lock body and cycle to the locked position **before** assembling cam, cam shifter and stop pin onto the back of the lock.

Typical Installation





Lock diameter is 1-1/8". Drilled hole should be slightly larger.

Installation instructions for 720LM/DM series cam lock				
Series	Barrel Length	Bolt type	Mounting	Revision Date
720	1-7/16"	Cam lock	Surface	09/2014



Assembled with vertical long cam 720-3-2 or extra long 3" cam 720-3-4










720-KR key retaining drawer cam shifter

720-CDDM (A Side)
key retaining door key recam shifter ca

key retaining door cam shifter

IMPORTANT! If your cam has a brass pin between the two notched cut outs use these instructions, otherwise see page 3.

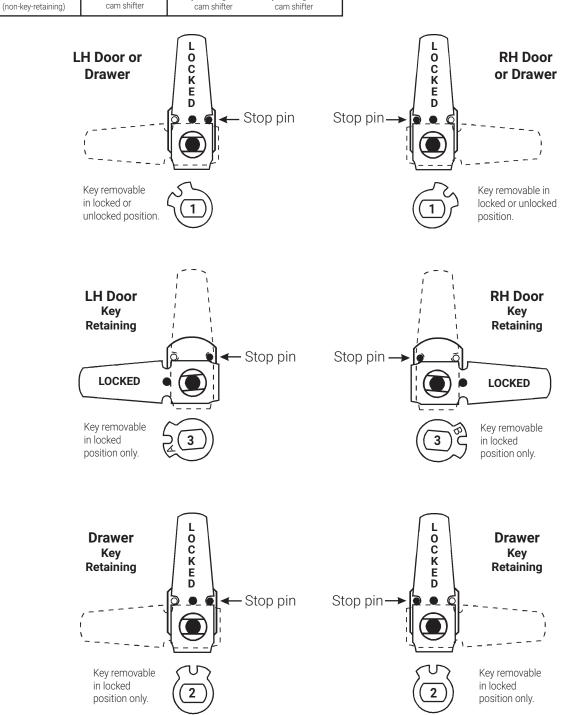



Assembled with vertical long cam 720-3-2 or extra long 3" cam 720-3-4







720-KR key retaining drawer cam shifter

Key removable

position only.

in locked



720-CDDM (A Side) key retaining door cam shifter




720-CDDM (B Side) key retaining door


key retaining door cam shifter IMPORTANT! If your cam has a brass pin on the bottom of the cam use these instructions, otherwise see page 2.

Key removable


position only.

in locked

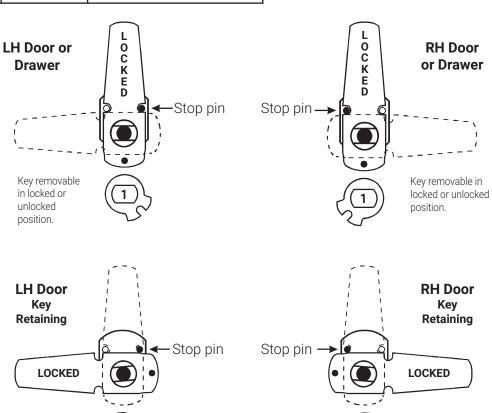

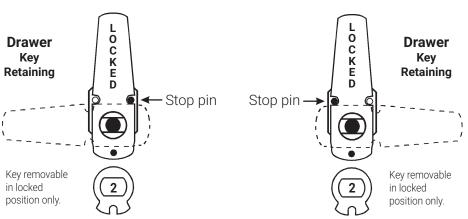

Assembled with short cam 720-3-1

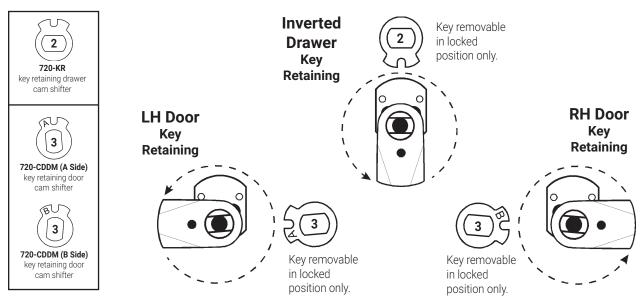

Assembled with inverted long cam 720-3-3 or 720-3-5

