

720LM/DM

SFIC: Cam Lock
For Small Format
Interchangeable Core



For BEST style
interchangeable
core cylinders

ANSI/BHMA Grade 1
E07261 | E07271
Woodwork Institute (WI)
acknowledged product

GENERAL SPECIFICATIONS

Function: Cam lock

Retrofits: Best 1E7E4

ANSI/BHMA: Passed ANSI/BHMA A156.11 Grade 1 performance requirements. Equivalent to E07261/E07271.

Cylinder diameter: 1-1/8"

Across flats: 7/8"

Max. material thickness: 1-1/8"

Min. material thickness: 0.08"

Functions: Includes parts for key-retaining or non-key-retaining function.

Cam installation: See our website for cam assembly instructions.

Body: Zinc die cast

Finish: 26D, US26, US3 or US4

Packaged: Packed 10 per box

KEYING INFORMATION

Cores: Not included.

Accepts: Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

Compatible electronic cylinders: Medeco Nexgen XT or VIDEK CyberLock SFIC cylinders

INCLUDES

725-PA plastic thumbturn

720-PL3 stabilizer plate

725-1 spacer to fit 6 or 7 pin cores


720-3-1 short inverted cam

720-3-2 long vertical cam

720-CDLM lost motion cam shifter

720-CDDM key retaining door cam shifter

720-KR key retaining drawer cam shifter



US26D finish




US26 finish



US4 finish




US3 finish




720-PL3
Anti-rotation plate
included

INCLUDED CAMS




720-3-1
for inverted function

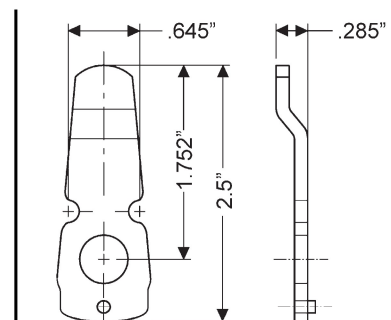

720-3-2
inbent cam for vertical function
(bottom-pin style)

HANDING CHART

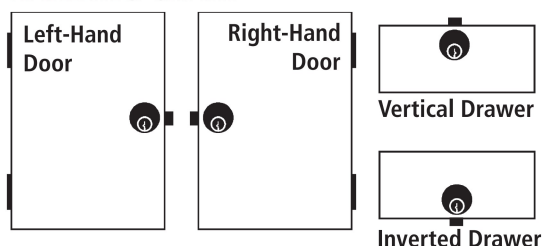

OLYMPUS
LOCK, INC.
The cabinet lock innovators.