


PRO 600 SERIES

Undermount Drawer Slides

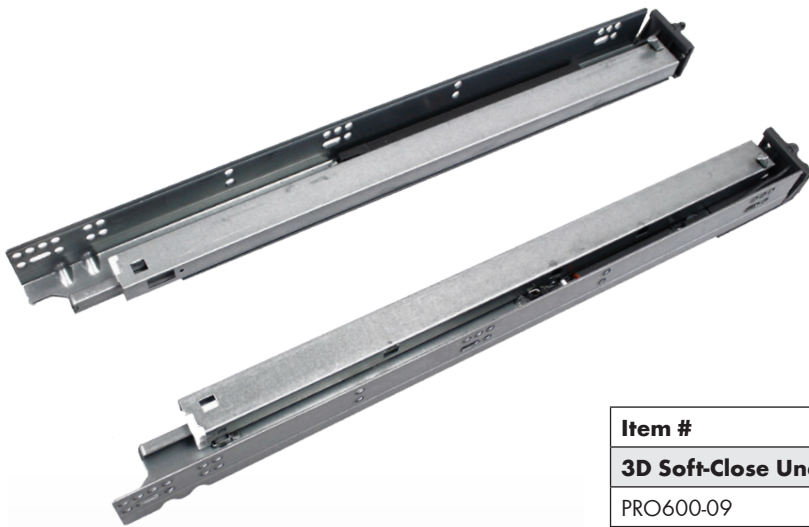


Features

- 12mm or 16mm drawer thickness
- Metal rear brackets included
- 100 lb capacity
- 130 lb capacity Heavy Duty
- 32mm hole pattern
- Full extension soft-close
- Industry rated BHMA, KCMA, & BIFMA
- Extra roller in the slide to prevent deflection
- 634 for 19mm drawer material thickness


PRO
600 SERIES

3D 6-WAY ADJUSTABLE LOCKING DEVICES



2-D Front Locking Device

1. Side: +1.5mm
2. Up & Down: 0 - 3mm
3. Depth: 0 - 3.5mm



2-D Front Locking Device

1. Side: +1.5mm
2. Up & Down: 0 - 3mm



C
Rear Brackets

Item #	Description	UM
3D Soft-Close Undermount Drawer Slides		
PRO600-09	09" UDM SFT CLS 3D FRNT CLIP 100LBS	PR
PRO600-12	12" UDM SFT CLS 3D FRNT CLIP 100LBS	PR
PRO600-15	15" UDM SFT CLS 3D FRNT CLIP 100LBS	PR
PRO600-18	18" UDM SFT CLS 3D FRNT CLIP 100LBS	PR
PRO600-21	21" UDM SFT CLS 3D FRNT CLIP 100LBS	PR
PRO634-09B	09" UDM SFT CLS 2D FRNT CLP 19MM DRWR	PR
PRO634-12B	12" UDM SFT CLS 2D FRNT CLP 19MM DRWR	PR
PRO634-15B	15" UDM SFT CLS 2D FRNT CLP 19MM DRWR	PR
PRO634-18B	18" UDM SFT CLS 2D FRNT CLP 19MM DRWR	PR
PRO634-21B	21" UDM SFT CLS 2D FRNT CLP 19MM DRWR	PR
Heavy Duty 3D Soft-Close Undermount Drawer Slides		
PRO600-24HD	24" HD UDM SFT CLS 3D FRNT CLIP 130#	PR
PRO600-27HD	27" HD UDM SFT CLS 3D FRNT CLIP 130#	PR
PRO600-30HD	30" HD UDM SFT CLS 3D FRNT CLIP 130#	PR

	Item #	Description	UM
A	PRO600-FCLIP2D	FRONT CLIP 2D RIGHT/LEFT	PR
	PRO600-FCLIP3D	FRONT CLIP 3D RIGHT/LEFT	PR
B	PRO600-FCLIP2D-NF	FRONT CLIP 2D RIGHT/LEFT - NON FLANGE	PR
	PRO600-FCLIP3D-NF	FRONT CLIP 3D RIGHT/LEFT - NON FLANGE	PR
	PRO600-FCLIPNARROW	FRONT CLIP NARROW RIGHT/LEFT	PR
C	PRO600-RBP	REAR MOUNT BRKT	EA

LP1843

Würth Louis and Company


(800) 422-4389 • www.wurthlac.com

OPT-OUT INFORMATION: You may request Würth Louis and Company not to send any future advertisements to a telephone facsimile machine or machines. Failure to comply with such a request in the form prescribed by law, within the shortest time prescribed by law not to exceed 30 days, is unlawful. If you wish to discontinue future fax advertisements from Würth Louis and Company, Please send your request by Email to: creditdepartment@wurthlac.com, or by Fax to: 800-944-7494 or by Calling: 800-444-0043 option 2. Your request should specify the telephone numbers or numbers of each telephone facsimile machine to which the request relates.


PRO 600 SERIES

Undermount Drawer Slides

Screw Positions of the Slides(mm)

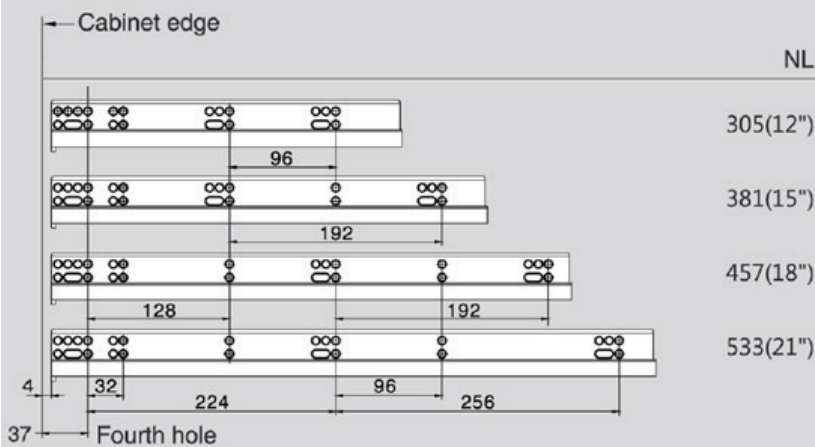


Metal Rear Mounting Bracket

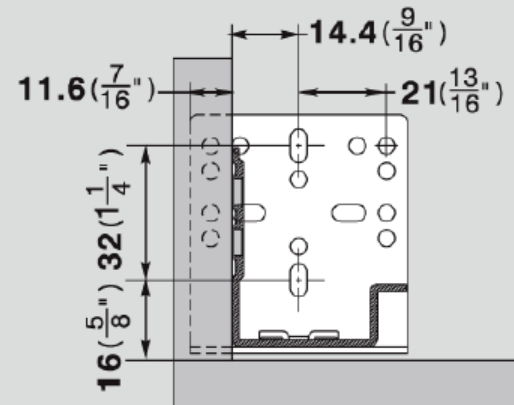


Installation Dimensions(mm)

LW=Internal Cabinet Width

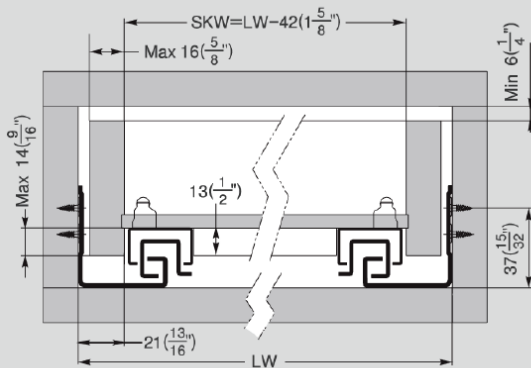


Drawer length	Runner length	Internal Cabinet Depth	
		Max	Min
229(9")	256(10 1/2")	298(11 3/4")	283(11 1/8")
305(12")	317(12 1/2")	369(14 9/16")	326(12 7/8")
381(15")	394(15 1/2")	446(17 9/16")	403(15 7/8")
457(18")	470(18 1/2")	522(20 9/16")	479(18 7/8")
533(21")	546(21 1/2")	598(23 9/16")	555(21 7/8")

Locking Device

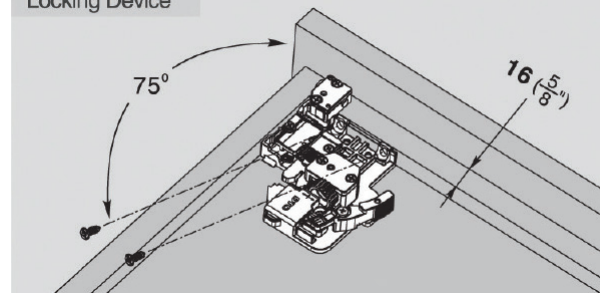

Locking Device (with Flange)

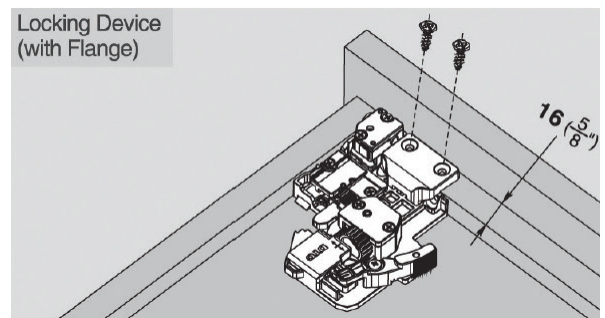

LP1843

Würth Louis and Company

(800) 422-4389 • www.wurthlac.com

OPT-OUT INFORMATION: You may request Würth Louis and Company not to send any future advertisements to a telephone facsimile machine or machines. Failure to comply with such a request in the form prescribed by law, within the shortest time prescribed by law not to exceed 30 days, is unlawful. If you wish to discontinue future fax advertisements from Würth Louis and Company, Please send your request by Email to: creditdepartment@wurthlac.com, or by Fax to: 800-944-7494 or by Calling: 800-444-0043 option 2. Your request should specify the telephone numbers or numbers of each telephone facsimile machine to which the request relates.