

# PRO 3W LED PUCK



- 2 Watts, 12 Volts, Bulb life: 25,000 hours
- Size: 2-1/4" Diameter Bore Hole 1/2" Height
- 53° Beam Spread, 1 year warranty

- **Required Component: Power Supply** - If you are **NOT** dimming from wall dimmer **-OR-**
- **Required Component: Dimmable Driver** - Dimmable Driver - If you are dimming from a wall dimmer



**A-** Nickel Finish shown  
**B-** Black


Packed & Sold In: Each

	PART #	QUICK CODE	DESCRIPTIONS
<b>A</b>	<b>PROPK2W-3NI</b>	<b>R101</b>	Pro 2W LED Puck W/79" cord, 12 Volts, Recess Mount, Warm White (3K), Nickel Finish
	<b>PROPK2W-5NI</b>	<b>R102</b>	Pro 2W LED Puck W/79" cord, 12 Volts, Recess Mount, Cool White (5K), Nickel Finish
<b>B</b>	<b>PROPK2W-3BL</b>	<b>R103</b>	Pro 2W LED Puck W/79" cord, 12 Volts, Recess Mount, Warm White (3K), Black Finish
	<b>PROPK2W-5BL</b>	<b>R104</b>	Pro 2W LED Puck W/79" cord, 12 Volts, Recess Mount, Cool White (5K), Black Finish

## REQUIRED COMPONENT FOR STANDARD DRIVERS / POWER SUPPLY:

If you are **NOT** dimming from a wall dimmer

	PART #	QUICK CODE	DESCRIPTIONS
<b>C</b>	<b>PROPRO-15ELT</b>	<b>R146</b>	15W, 12V Power Supply w/6 AMP Ports
	<b>PROPRO-30ELT</b>	<b>R147</b>	30W, 12V Power Supply w/6 AMP Ports
	<b>PROPRO-60ELT</b>	<b>R148</b>	60W, 12V Power Supply w/6 AMP Ports
<b>12V DIMMER SWITCHES &amp; ON/OFF SWITCHES</b> (Used with Power supply)			
<b>D</b>	<b>PROSQRD-NI</b>	<b>R151</b>	60W, Sq. Touch Dimmer w/96" Input - 6" Output Wires
	<b>PRORNDTD-NI</b>	<b>R152</b>	60W, Round Touch Dimmer w/79" Input - 6" Output Wires
<b>E</b>	<b>PRORNDPS-NI</b>	<b>R153</b>	60W, Round Proximity Switch w/79" Input - 6" Output Wires
	<b>PRORNDSD-NI</b>	<b>R154</b>	60W, Round Door Sensor w/79" Input - 6" Output Wires
<b>F</b>	<b>PROROTDIM-BL</b>	<b>R156</b>	48W, Rotary Dimmer w/79" Input - 8" Output Wires
<b>G</b>	<b>PRORNDON-BL</b>	<b>R155</b>	60W, Round On/Off Switch w/79" Input - 6" Output Wires

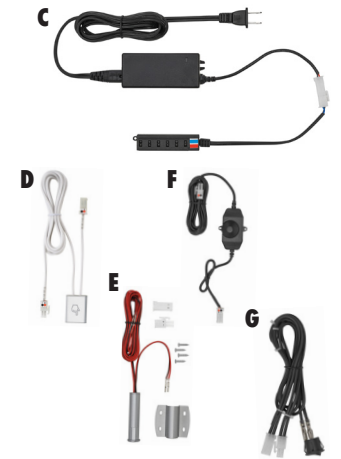

**-OR-**

## REQUIRED COMPONENTS FOR WALL DIMMING: MUST PURCHASE DIMMER DRIVER W/ DIMMER SWITCHES

Dimmable Driver - If you are dimming from a wall dimmer - sold separately (J&K or J&L)

	PART #	QUICK CODE	DESCRIPTIONS	TAPE CAPACITY
<b>REQUIRED COMPONENT • USE TO DIM LED TAPE WITH WALL DIMMER. HARDWIRE DIRECT TO WALL DIMMER SWITCH</b>				
<b>H</b>	<b>PROPRO-12ELTDIM</b>	<b>R149</b>	12W, 12V Dim Driver w/6 AMP Ports	4'
	<b>PROPRO-24ELTDIM</b>	<b>R150</b>	24W, 12V Dim Driver w/6 AMP Ports	8'
<b>LED WALL DIMMER USED WITH DIMMABLE DRIVERS</b>				
<b>I</b>	<b>RVDVCL-153PH-WH</b>	<b>T321</b>	150W, Lutron Diva® C•L™ Dimmer w/out plate	
<b>J</b>	<b>RVCTCL-153P-WH</b>	<b>T320</b>	150W, Lutron Skylark Contour C•L™ Dim w/out plate	



## LED ACCESSORIES

### LINKING WIRES • LINKS TWO TAPES TOGETHER

	PART #	QUICK CODE	DESCRIPTION
<b>K</b>	<b>PROPTCON-2IN</b>	<b>R139</b>	2" Linking Wire
	<b>PROPTCON-6IN</b>	<b>R140</b>	6" Linking Wire
	<b>PROPTCON-10IN</b>	<b>R141</b>	10" Linking Wire
	<b>PROPTCON-24IN</b>	<b>R142</b>	24" Linking Wire
	<b>PROPTCON-48IN</b>	<b>R143</b>	48" Linking Wire
	<b>PROPTCON-72IN</b>	<b>R144</b>	72" Linking Wire

### EXTENSION CORDS

	PART #	QUICK CODE	DESCRIPTION
<b>L</b>	<b>PROEXTCON-3IN</b>	<b>R157</b>	3" Extension Cord
	<b>PROEXTCON-6IN</b>	<b>R158</b>	6" Extension Cord
	<b>PROEXTCON-10IN</b>	<b>R159</b>	10" Extension Cord
	<b>PROEXTCON-24IN</b>	<b>R160</b>	24" Extension Cord
	<b>PROEXTCON-48IN</b>	<b>R161</b>	48" Extension Cord
	<b>PROEXTCON-72IN</b>	<b>R162</b>	72" Extension Cord
	<b>PROEXTCON-96IN</b>	<b>R163</b>	96" Extension Cord

### EXTRA MOUNTING BLOCK

	PART #	QUICK CODE	DESCRIPTION
<b>N</b>	<b>RVTRANS-MNT-BL</b>	<b>T179</b>	6 Snap Mounting Block



### SURFACE MOUNT RING

	PART #	QUICK CODE	DESCRIPTIONS
<b>M</b>	<b>PROPKSMR-NI</b>	<b>R110</b>	Nickel Finish
	<b>PROPKSMR-BL</b>	<b>R109</b>	Black Finish