


ESR-13 STAINLESS STEEL DRAWER SLIDE TWO MEMBER 3/4 EXTENSION POSITIVE STOP / POSITIVE CATCH

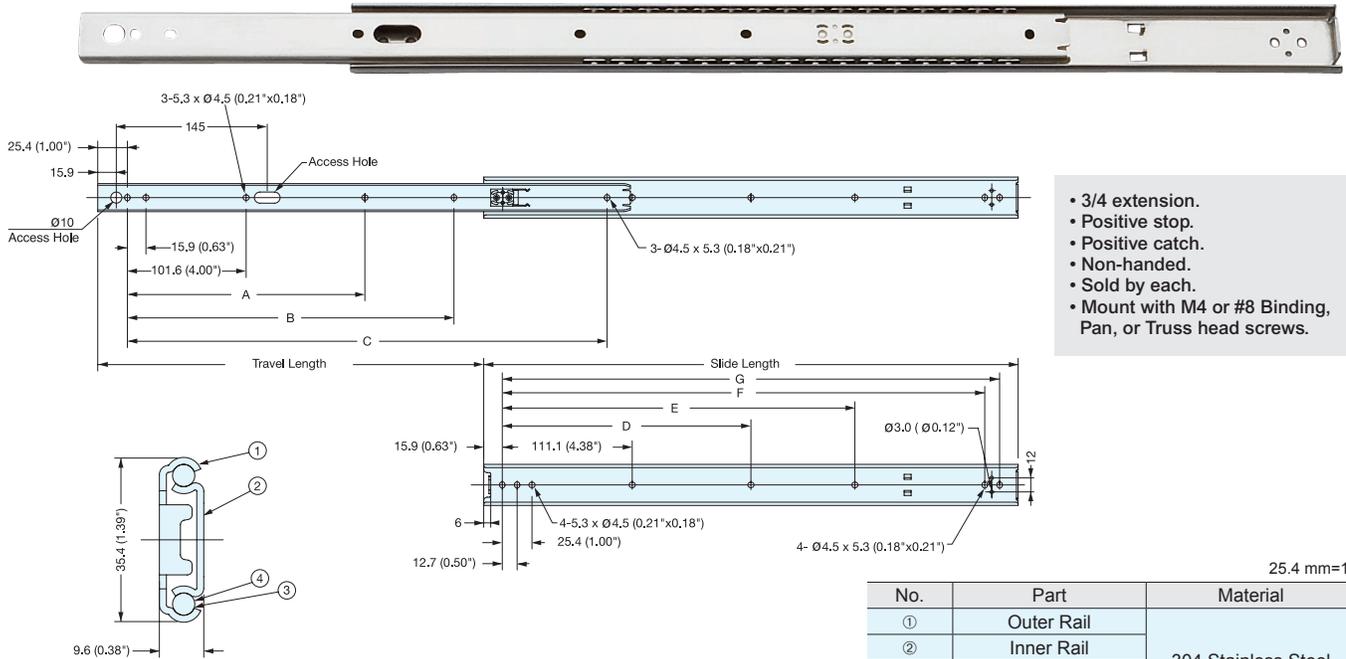

- 3/4 extension.
- Positive stop.
- Positive catch.
- Non-handed.
- Sold by each.
- Mount with M4 or #8 Binding, Pan, or Truss head screws.

Item No.	Slide Length	Travel Length	A	B	C	D	E	F	G	# of Holes		Load Rating (kg/pair)	Weight (g)	Box (pcs)
										Inner Rail	Outer Rail			
ESR-13-12	304.8 (12")	228.6 (9")	-	177.8	258.0	-	149.2	260.3	273.0	4	7	49 (107 lbs)	330	30
ESR-13-14	355.6 (14")	279.4 (11")	-	228.6	308.8	-	200.0	311.1	323.8	4	7	47 (103 lbs)	380	
ESR-13-16	406.4 (16")	304.8 (12")	-	254.0	359.6	-	250.8	361.9	374.6	4	7	43 (94 lbs)	420	
ESR-13-18	457.2 (18")	330.2 (13")	203.2	279.4	410.4	212.7	301.6	412.7	425.4	5	8	41 (90 lbs)	490	
ESR-13-20	508.0 (20")	381.0 (15")	228.6	330.2	461.2	238.1	352.4	463.5	476.2			37 (81 lbs)	540	
ESR-13-22	558.8 (22")	406.4 (16")	254.0	355.6	512.0	263.5	403.2	514.3	527.0			34 (74 lbs)	590	
ESR-13-24	609.6 (24")	431.8 (17")	254.0	381.0	562.8	288.9	454.0	565.1	577.8			30 (66 lbs)	630	
ESR-13-26	660.4 (26")	482.6 (19")	254.0	431.8	613.6	314.3	504.8	615.9	628.6	27 (59 lbs)	680			
ESR-13-28	711.2 (28")	508.0 (20")	279.4	457.2	664.4	339.7	555.6	666.7	679.4	25 (55 lbs)	750			

MOUNTING INSTRUCTIONS

1. Separate the drawer and cabinet member by pressing the drawer lock and firmly pulling through the friction resistance.
2. Mount the outer rails to the cabinet by positioning the front end (where the plastic member is located) to the front edge of the cabinet. If the drawer is to be mounted flush with the cabinet, please allow space for the thickness of the drawer face when installing outer rails.
3. Mount the inner rails to the drawer by positioning the front end (where the access hole is located) of the slide behind the face of the drawer.

Sugatsune America, Inc.
18101 Savarona Way Carson, CA 90746
Tel 310-329-6373 Fax 310-329-0819
www.sugatsune.com