

Revision 1

POWER OFF
OUTLET
when the
DOOR
CLOSES





- Appliance Garages with toasters, microwaves, coffee makers, mixers, blenders, air fryers, and more.
- Any other application where devices are left plugged in and unattended behind a cabinet door.

✉ sales@dockingdrawer.com 🌐 www.dockingdrawer.com 📞 (530) 205-3625 🏠 12893 Alcosta Blvd, Suite M, San Ramon, CA 94583

Docking Drawer® 0290-6120B67 Safety Interlock Disconnect Kit with Magnetic Limit Switch

Disconnect Specs

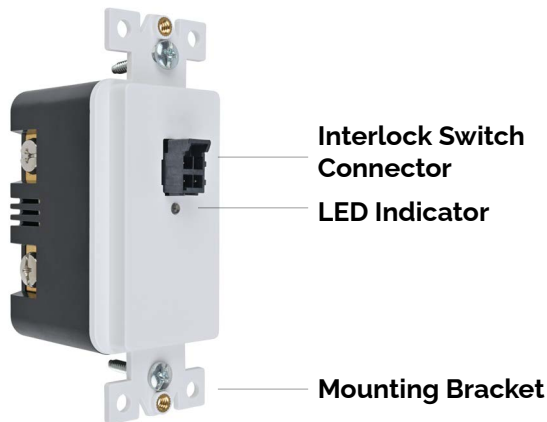

Input	100 - 125 VAC, 50/60 Hz
AC Output	20A@125VAC, 2500 VA MAX, 2 HP
DC Output	24VDC @ 100mA MAX
DC Power Supply	IEC Class II
Number of Receptacles	0
Tamper Resistant	NA
LED Indicator	Yes
Conformance	 UL60730, UL498, EN61558, EN60730, EN62386, CSA C22.2#42
Environmental	-10 °C to +50 °C, non condensing
Warranty	2 Years

AC Outlet Specs



AC Output	20A@120VAC
Number of Receptacles	(4) NEMA 5-20R
GFCI	No


Limit Switch Specs




Switch Length	1.06" (27mm)
Switch Diameter	0.25" (6.5mm)
Magnet Width	0.12" (3.2mm)
Magnet Diameter	0.37" (9.5mm)

Mounting Details

Can be installed in any cabinet or enclosed space using one of the following methods: surface mount with the included clamp and screw, or inset mount directly into the cabinet.

Conformance	 UL60730, UL498, EN61558, EN60730, EN62386, CSA C22.2#42
Warranty	2 Years

Limit Switch Options

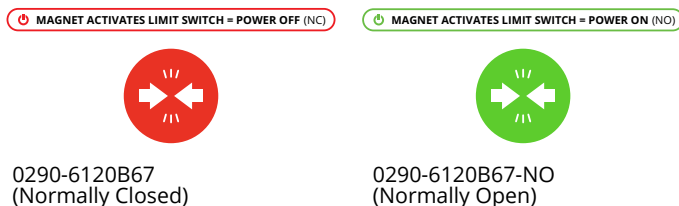

Resources & Downloads

Docking Drawer provides all of the necessary resources to plan a Safety Interlock Disconnect installation. Download the Spec Book and Installation Manuals at dockingdrawer.com/downloads

Ready to Order?

Source directly from Docking Drawer or from one of our distribution partners. [Learn more.](#)

Project Name:

Where to Source: ☐ Docking Drawer ☐ Distributor

Lead Time - 2 weeks Freight - FOB San Ramon Warranty - 2 Years [Terms & Conditions](#)