
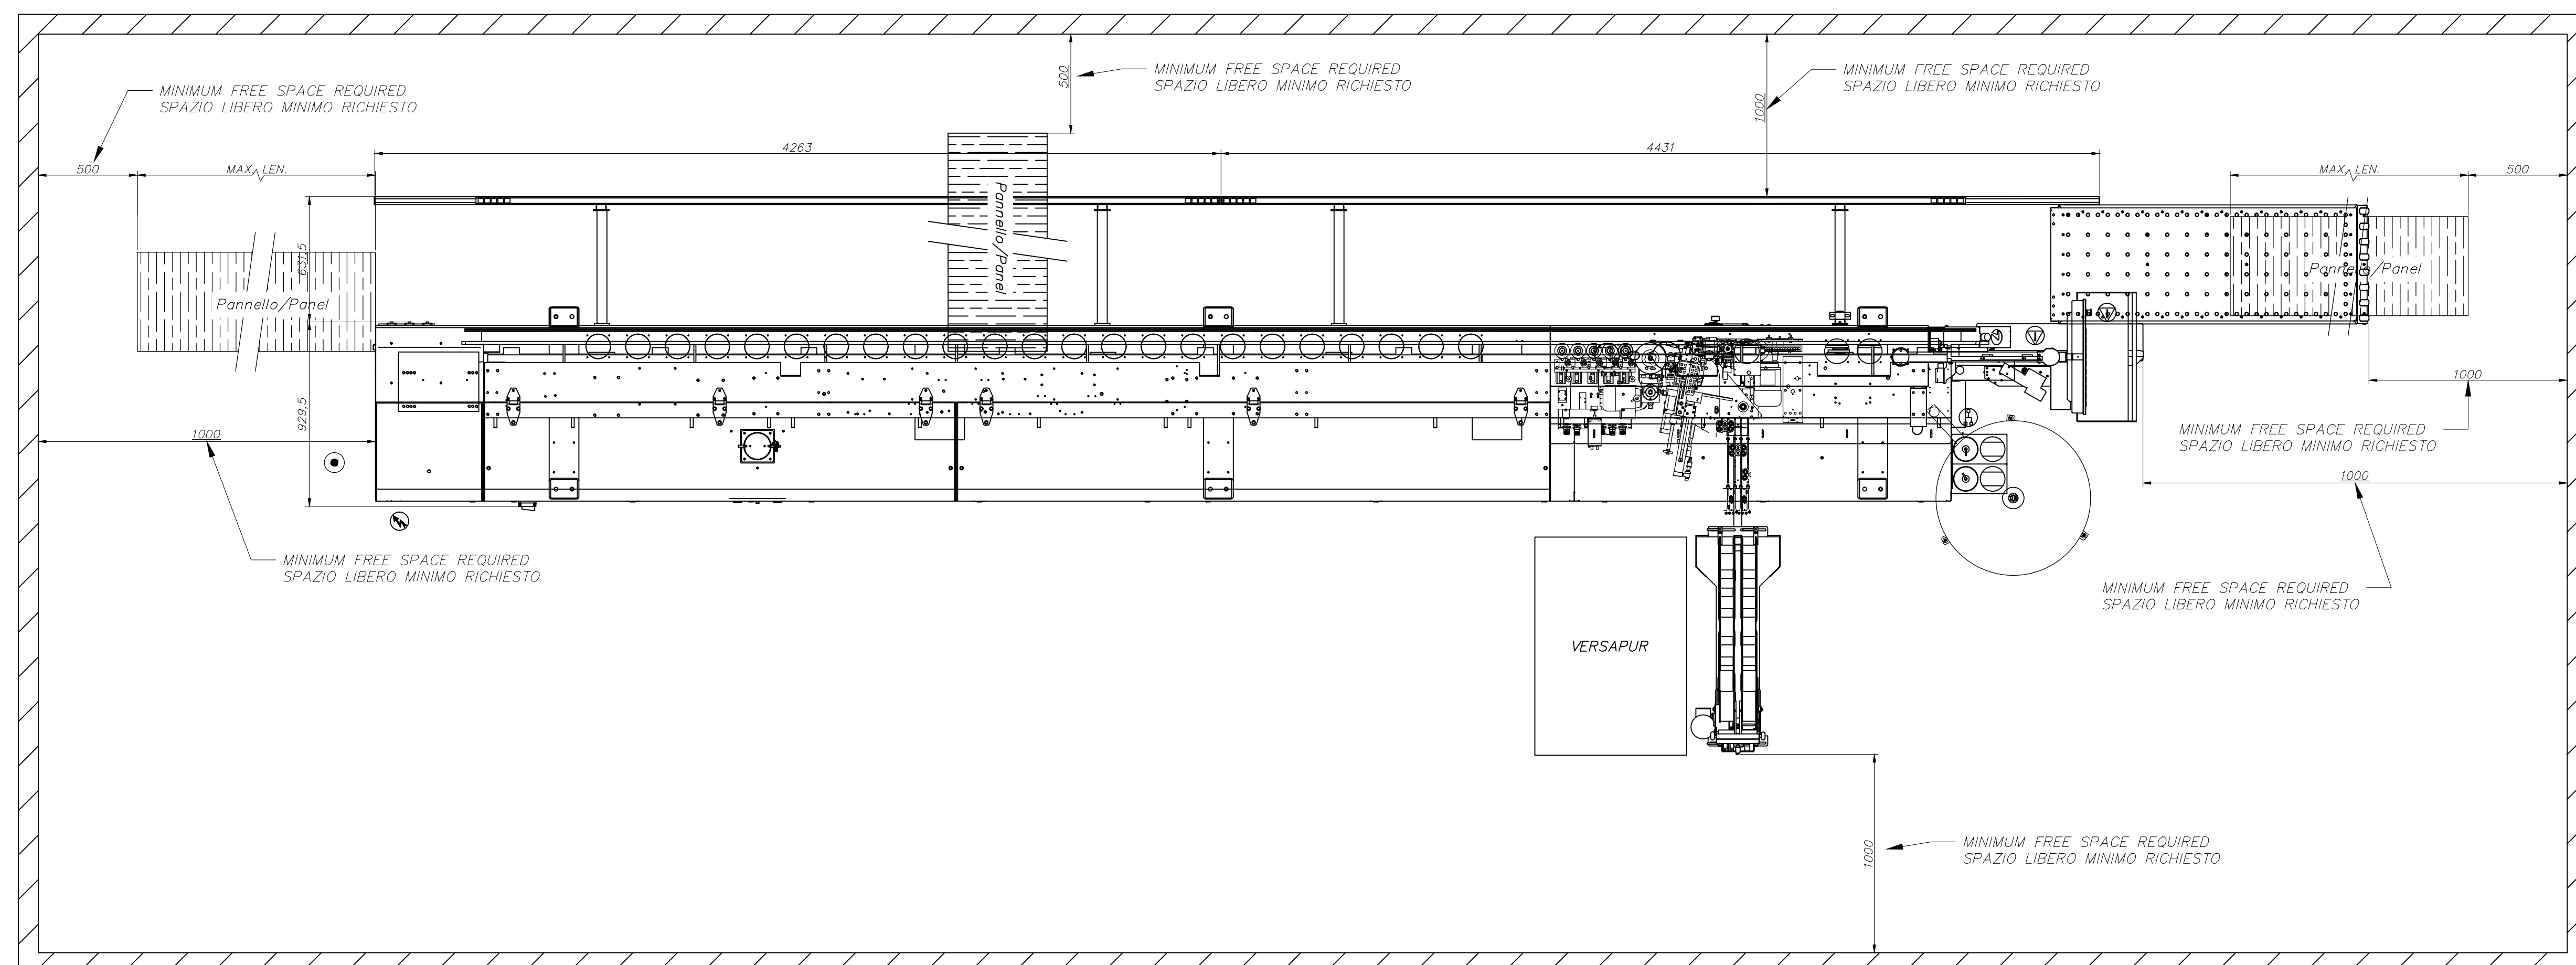
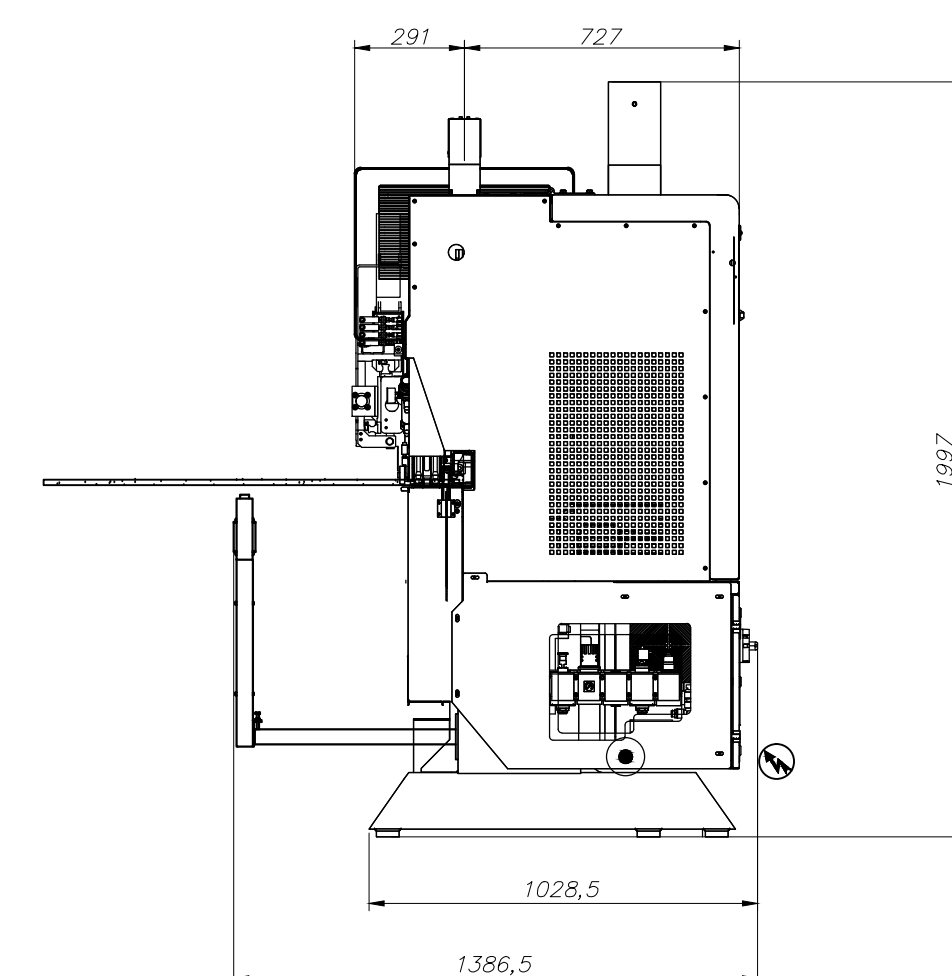


The machine's performance are guaranteed working panels with dimensions not exceeding those set
The measures of free space around the machine are the minimum required by current regulations

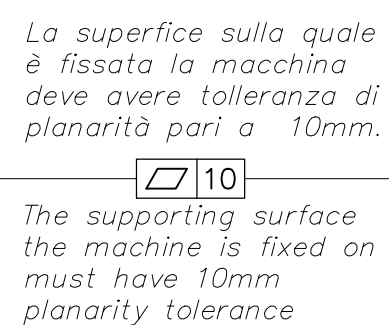

CARATTERISTICHE PAVIMENTO – FLOOR CHARACTERISTICS	
L'esecuzione delle fondamenta è a cura e responsabilità del cliente/The execution of the foundations is customer's responsibility	
Cedimento differenziale massimo ammissibile/Admissible floor differential vertical displacement	0,02mm/m
Tolleranza planarità del pavimento ad uso industriale UNI 11146:2005/Tolerance on flatness of the floor for industrial use UNI 11146:2005	6mm/4m
Tolleranza orizzontale del pavimento ad uso industriale/Tolerance horizontality of the floor for industrial use	10mm/4m, macchina 10mm/machine length
Peso Max su singolo piede del basamento macchina/Maximum weight on a single foot of machine frame	10500N

BORDATRICE - EDGE BANDING MACHINE			
DATI TECNICI - TECHNICAL DATA			
ARIA ASPIRATA EXTRACTED AIR	VELOCITA' - SPEED (m/s)		28
	INCOLLAGGIO - GLUING UNIT		1250
	GRUPPO OPERATORI - MACHINING UNITS		8000
La depressione statica nelle bocchette di aspirazione deve essere al massimo 1500Pa (con velocità di aspirazione pari a 20m/s). The pressure drop through the inlet of air capture device and the connection to the chip and dust extraction system should be maximum 1500Pa (at 20m/s or flow rate)			
ARIA COMPRESSA COMPRESSED AIR	PRESSIONE DI ALIMENTAZIONE MIN. - INPUT PRESSURE MIN. (MPa)		0,8
	PRESSIONE DI ESERCIZIO - OPERATING PRESSURE (MPa)		1,0
	CONSUMO - CONSUMPTION (NL/MIN)		065

[illegible]