


# KK711Y




## VSM ALUMINIUM OXIDE

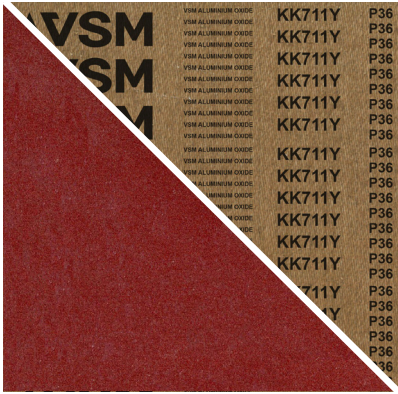


<b>Grain type</b>	Aluminium oxide
<b>Bonding</b>	Full-resin bonded
<b>Colour</b>	Red-brown
<b>Backing</b>	Y-Polyester (P36-P180) Y-Cotton (P220-P500)
<b>Flexibility</b>	Very sturdy
<b>Production width</b>	1.480 mm (P36-P180) 1.450 mm (P220-P500)

### Materials



### Features



Universal, high-performance aluminium oxide abrasive with a closed coat on a very sturdy polyester or cotton cloth backing. Applications include wet grinding, preparing workpieces for polishing work or deburring after laser cutting or water jet cutting. Characterised by its long service life.

### Grit sizes:<sup>1)</sup>



## Benefits

- > High performance abrasive
- > Universally applicable
- > Long service life
- > Highly resilient
- > Cooling lubricant resistant up to and including P80

**VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG**  
Siegmundstraße 17 · 30165 Hannover · Germany  
T +49 511 3526 0 · F +49 511 3521 315  
sales@vsmabrasives.com · [www.vsmabrasives.com](http://www.vsmabrasives.com)



Please scan this QR code for detailed product information.



<sup>1)</sup> P = Categorized according to the FEPA standard. Subject to technical changes.