




In supporting roles everywhere


Rakks EHV-Vanity Supports Stocked & Make-to-Order Vanity Brackets Information & Installation



Typical-Stocked Vanity Enclosure

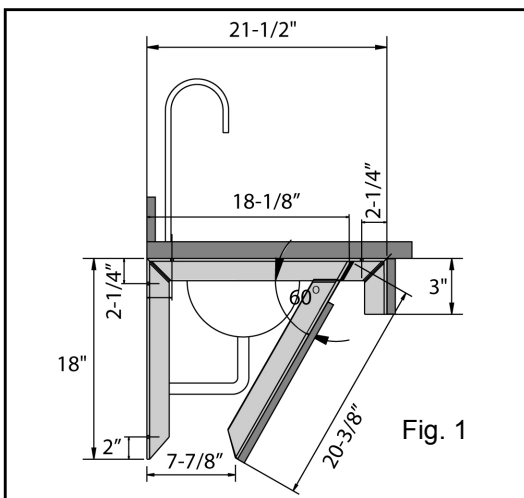

Make-to-Order Vanity Enclosure

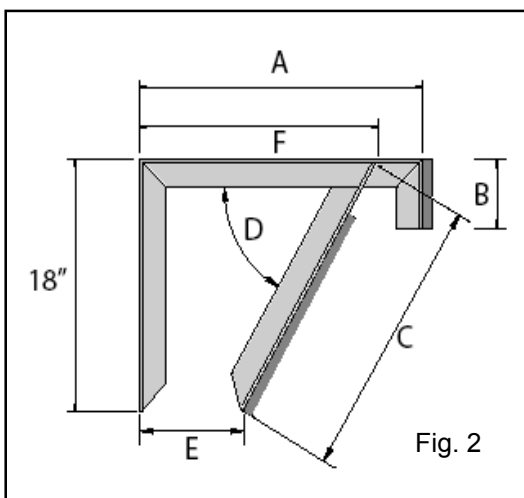

Rakks Vanity Brackets

Rakks ADA compliant aluminum vanity brackets simplify and reduce the cost of installing sinks and provide a stable and sturdy mounting surface for custom-built enclosures. Vanity Brackets are supplied with wooden strips on the front faces to provide for the convenient mounting, or removal, of laminated or solid surface panels. Stocked in a standard size of 18 x 21-1/2" (Figure 1) they are also offered on a custom make-to-order basis.

Make-to-Order Vanity Brackets

Manufactured to order, usually with in a period of a week, Rakks Vanity brackets can be easily customized to meet specific project or accessibility requirements. See "A" through "F" (figure 2) to specify your requirements.

Vanity Bracket Installation

Rakks Vanity Brackets can carry significant loads but they must be securely fastened to the wall. With continuous blocking, or double-stud construction, brackets can be spaced as much as 4 feet apart. Weight capacity is 450#. Weight capacity is based on evenly distributed static loads.

Recommended hardware: 1/4" x 2" Philips pan head sheet metal screws or heavy duty Toggle Bolts.

When mounting into wood studs "toeing" into the stud will ensure that all screws are fully engaged. Otherwise, align the bracket so that one top and one bottom screw are fully engaged. Heavy duty toggle bolts are recommended for mounting into metal studs. We suggest spacing brackets every 32" when installing into metal studs or in any application where just two screws are securing the bracket to the wall.

Note: Custom Vanity Brackets can not be returned.

Engineered and manufactured in the United States by:
Rangine Corporation, Needham, Massachusetts 02494
Tel: 781-455-8700, 800-826-6006 Fax: 781-455-8702
www.rakks.com

Dec 2011